MILITARY SPECIFICATION

GENERATOR SET, DIESEL ENGINE, TRAILER MOUNTED

100 KW, 50/60 HERTZ, PU-495B/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1. Scope. This specification covers a trailer mounted generator set (hereinafter referred to as a power unit) designated PU-495B/G. The power unit consists of a Department of Defense standard, diesel-engine-driven, 100 kW, 50/60 Hertz tactical generator set, various auxiliary equipment, brackets, and hardware mounted on a modified government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS35494-56	- Screw, Wood, Steel, Cadmium or Zinc, Flat Head, Slotted.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13226E1340	- Generator Set, Diesel Engine, Trailer Mtd. 100 kW, 50/60 Hertz, Tactical, PU-495B/G.

(Copies of specifications, standards, and drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

U.S. DEPARTMENT OF COMMERCE

Product Standard

PS1 - Softwood Plywood; Construction and Industrial.
PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIRMENTS

3.1 Description. The PU-495B/G shall be in accordance with Top Assembly TA13226E1340 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD 642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination within the time frame specified (see 6.2), to prove prior to starting production that his production methods will produce power units that comply with the requirments of this specification. Examinations shall be as specified in Section 4 and unless otherwise specified herein, all examinations shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations as specified (see 6.2).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8 and 6.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No	Description	Identification	Quantity for each PU-495B/G
1	Chassis, trailer, 3-1/2 ton, 2 wheel, Model M353	MIL-C-45150	1
2	Generator Set, diesel-engine-driven 100 kW, 50/60 Hertz Tactical Model MEP-007B	NSN 6115-01-036-6374	1

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of the examination by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirments shall be rejected. Reassembly with accepted parts and reexamination shall be the responsiblity of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power units which conform to all requirements in Sections 3 and 5 of this specification and pass all applicable examinations in Section 4 of this specification will be considered acceptable by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4)
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or shall be cause for performing the inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.
106. Identification or special marking missing or illegible.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107. Materials, containers, or procedures not as specified. Each incorrect material, container, or procedure shall constitute one defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

108. Generator set not preserved as specified.
109. Fire extinguisher not removed and preserved as specified.
110. Ground cable not disconnected and secured and the cable and terminals not matchmarked as specified.
111. Repair parts and maintenance tools not preserved as specified.
112. Trailer chassis components not preserved as specified.
113. Hammer not removed from the bracket and secured as specified.
114. Packing not as specified.
115. Depreservation guides not prepared and attached to the power unit as specified.
116. Technical publications not preserved and secured as specified.
117. Marking, illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation, and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparision between the preproduction model power unit and production power units. Government-furnished property (GFP) shall be preserved and packed as specified herein, regardless of the preservation and packing provided at time of receipt by the manufacturer.

5.2 Preservation. Preservation shall be level A, level B, or commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with table I, figures 1 and 2, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level A, method IIa. The generator set shall be secured directly through the barrier material to the trailer chassis, using the required mounting bolts, in lieu of the shipping container specified in MIL-G-28554. The humidity indicators and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator. Before enclosing the generator in the method IIa barrier, the following preservation shall be accomplished.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional and shall be secured with tape conforming to PPP-T-97, type IV within the confines of the generator set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.2.1.3 Hammer. The hammer shall be removed from the brackets and secured to the generator set with tape conforming to PPP-T-97, type IV.

5.2.1.4 Ground cable. The ground cable shall be disconnected from the generator set and trailer chassis. The cable and terminals on the power units shall be matchmarked with cloth tags conforming to UU-T-81, type A, to facilitate reinstallation of the cable. The cable shall be stowed within the confines of the generator set.

5.2.1.5 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.1.6 Repair parts. The preservation application criteria and applicable submethod of MIL-P-116 shall be used to preserve the repair parts, if any.

5.2.1.7 Maintenance tools. Maintenance tools, if any, shall be preserved in accordance with PPP-P-40, level A.

5.2.1.8 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be secured to the generator set outside the method II barrier.

5.2.1.9 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-G-28554, level A.

5.2.2 Level B.

5.2.2.1 Generator set and trailer chassis. The generator set and trailer chassis shall be preserved in accordance with MIL-G-28554, level B.

5.2.2.2 Other components. All other components of the power unit shall be preserved as specified for level A.

5.2.3 Commercial. Power units shall be preserved in accordance with MIL-STD-1188. Ground cables shall not be disconnected. In addition, the crankcase shall contain the required amount of specified lubricating oil for the ambient temperature and the cooling system shall be filled with a clean, fresh solution of 50 percent water and 50 percent antifreeze conforming to MIL-A-46153.

5.3 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.3.1 Level A. Packing shall be in accordance with table I and figures 1 and 2 for level A. Repair parts and maintenance tools, if any, for each power unit shall be placed in the accessory box as space permits. When space is not available the repair parts and maintenance tools, if any, shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, and shall be secured to the power unit in a manner that will not increase the cube or interfere with lifting of the unit. Strapping for securing the box shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.3.2 Level B. Packing shall be in accordance with table I and figures 1 and 2 for level B. Repair parts and maintenance tools, if any, shall be packed as specified in 5.3.1 for level A except that boxes shall be Domestic Type.

5.3.3 Commercial. Power units shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guide shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Date of issue of DoDISS applicable and exceptions thereto (see 2.1.1).
(c) Time frame required for submission of preproduction model (see 3.2).
(d) When the Government will conduct any or all of the preproduction model examinations. When the Government will conduct some but not all of the preproduction examinations, the contracting officer should specify which examinations will be conducted by the Government and which examinations shall be conducted by the contractor (see 3.2).
(e) Time frame required for submission of the preproduction pack (see 5.1).
(f) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(g) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power units from the approved preproduction model during production will be subject to approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power units conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power units in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

6.9 Materiel deterioration prevention and control (MADPAC). The contracting officer should consider for inclusion in all applicable invitations for bid, requests for proposal, and contracts the following statement:

"The technical proposal shall provide assurance that all system/item parts shall be fabricated from compatible materials, suitably finished, to provide protection from corrosion and other forms of materiel deterioration. The assurance shall be in the form of a finish plan, utilizing state-of-art technology, which clearly identifies the specific finish or treatment to be used on the various components and assemblies, to provide protection against the various forms of materiel deterioration in the applicable operating and storage environments to which they may be exposed."

Custodian:
Army - ME

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 6115-A470

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE I PACKAGING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B
1	PPP-B-601 OVERSEAS TYPE, STYLE I, MODIFIED (NOTES 1 & 3)	BOX, PLYWOOD 1/4 THICK	1	1
2	MIL-B-131, CLASS I	BARRIER, MATERIAL	AR	
3	MIL-G-12803, TYPE I, RUBBER BINDER 1-1/2 X 1-1/2 X 1/8	GASKET 11/16 DIA. HOLE IN CENTER	24	
4	NN-P-530 (NOTE 2)	PLYWOOD 3/8 THICK	1	
5	QQ-S-781, TYPE I, OR IV, FINISH B	STEEL STRAPPING, FLAT .020 X 3/4	AR	
	QQ-S-781, TYPE I, OR IV, FINISH A	STEEL STRAPPING, FLAT .020 X 3/4		AR
6	NN-P-530 (SEE NOTE 2)	COVER, PLYWOOD, 1/4 THK.	1	
7	MS35494-56	SCREW, WOOD, STEEL, CADMIUM OR ZINC, FLAT HEAD, SLOTTED	4	

NOTES

1 NO CONTENT WEIGHT, WITHOUT BOTTOM

2 GROUP A, CONFORMING TO PS-5I TYPE, I GRADE 3-4 OR GROUP B, CONFORMING TO PS-1 GRADE C-D INTERIOR, WITH EXTERIOR GLUE

3 TOP TO BE ONE PIECE, 1/2 THICKNESS AND SHALL COMPLETELY COVER ALL EDGES

X-3611C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.


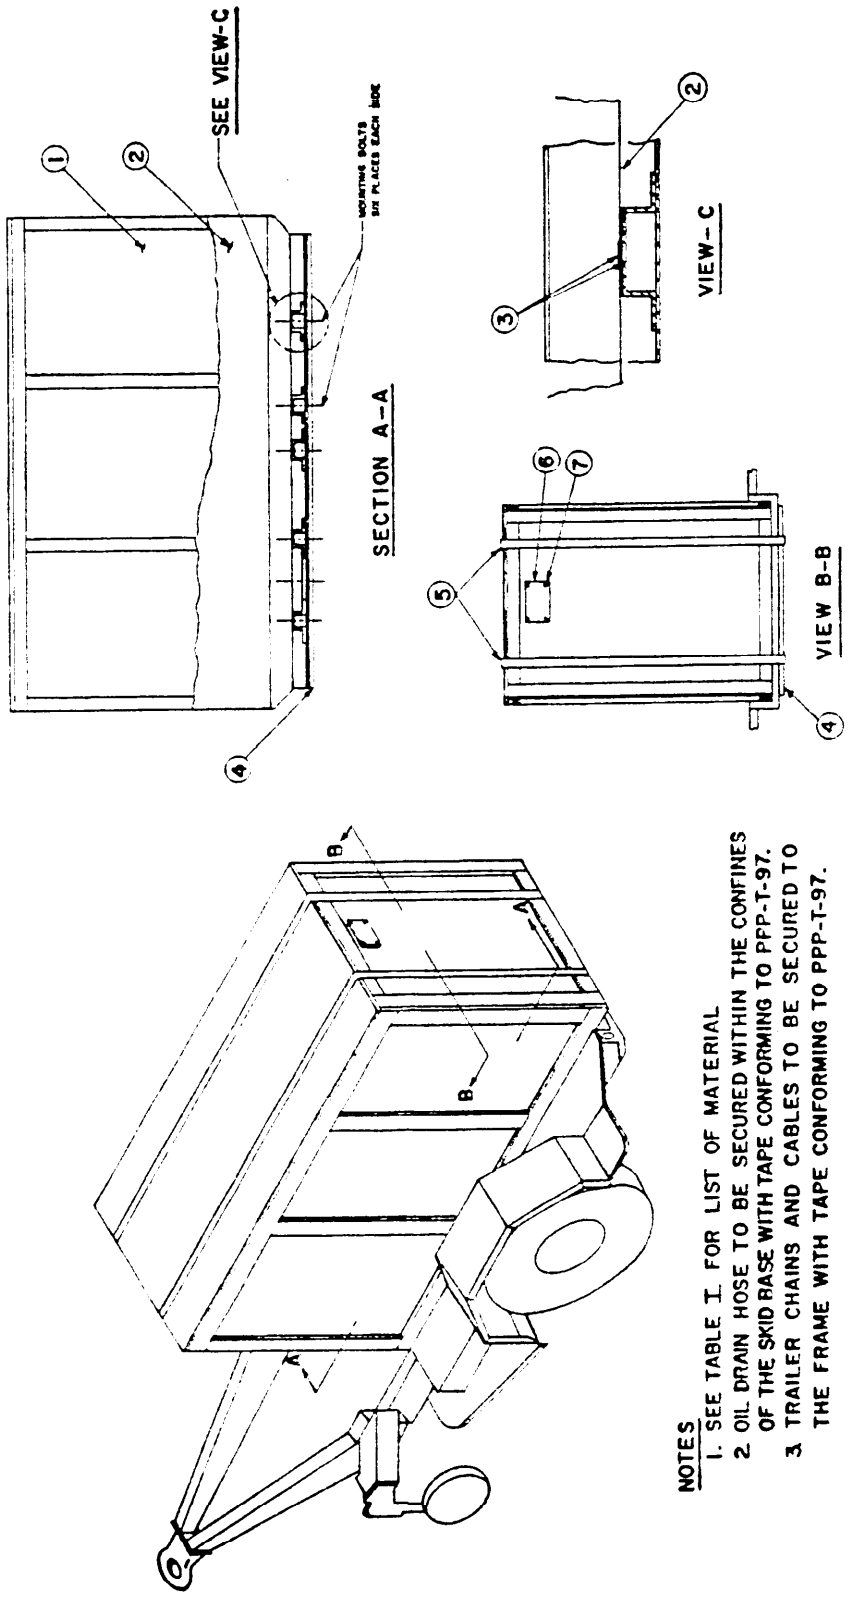


FIGURE I. Packaging arrangement, details and views (assembled)

X-3609C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

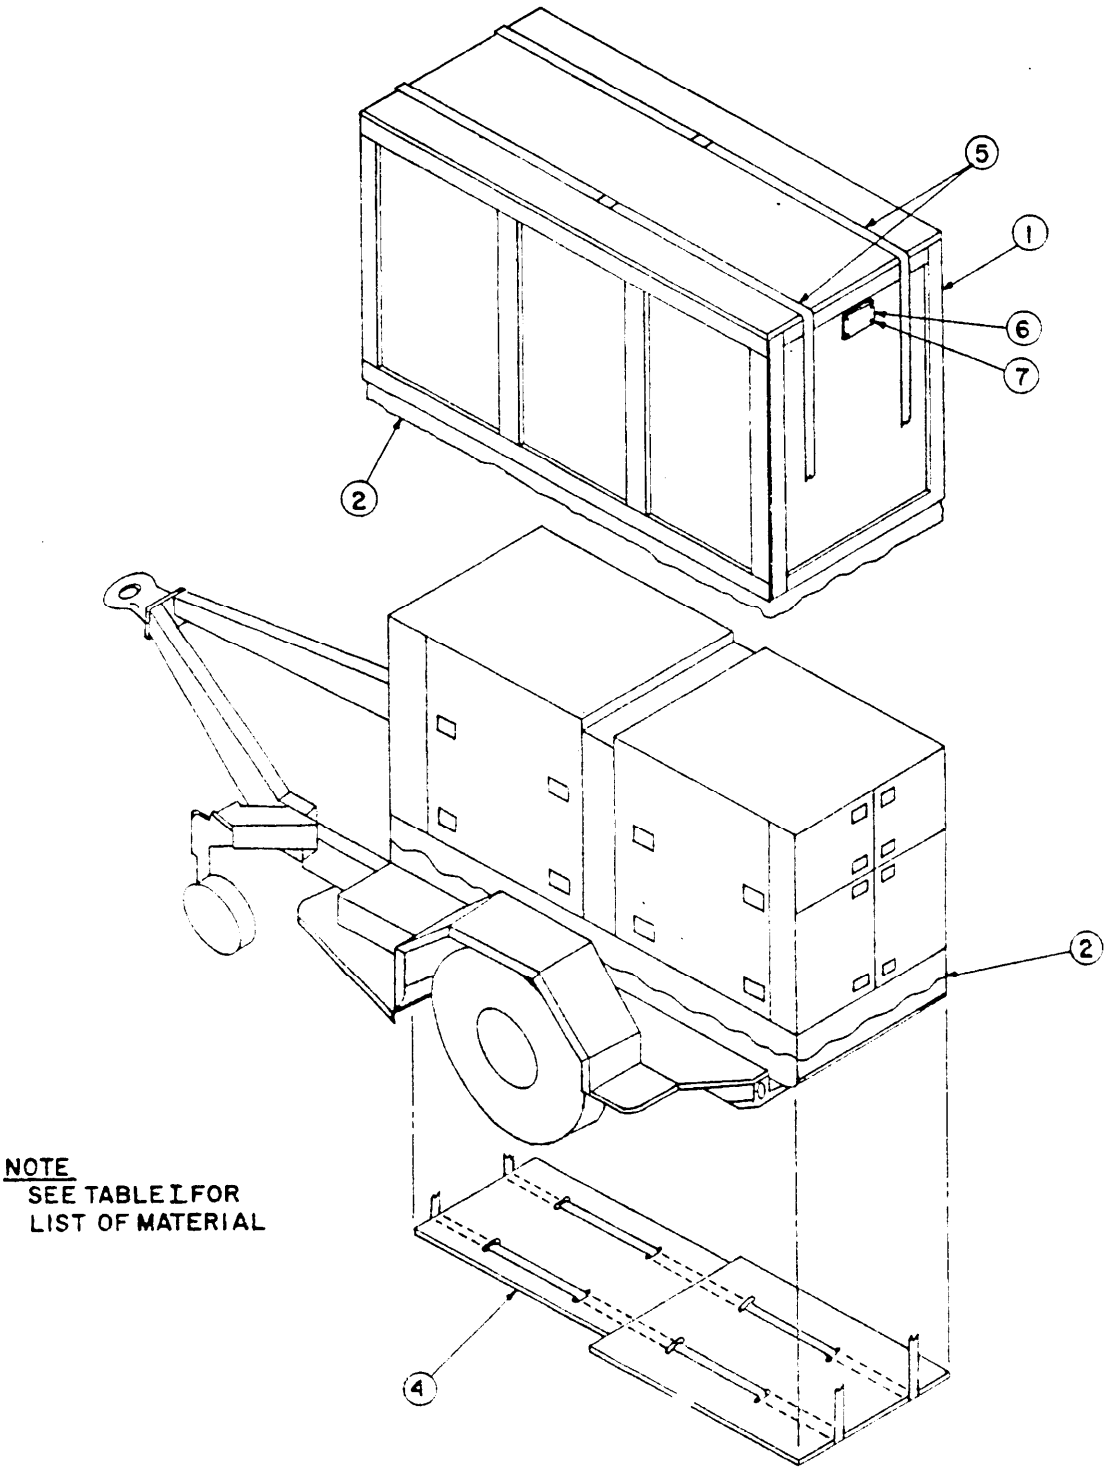

NOTE
SEE TABLE I FOR
LIST OF MATERIAL

FIGURE 2. Packing arrangement and detail (exploded)

X-3610B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-G-53010(ME) Generator Set, Diesel Engine, Trailer Mounted 100 KW, 50/60 Hertz, PU-495B/G

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY MOBILITY EQUIPMENT RESEARCH
AND DEVELOPMENT COMMAND
ATTN: DRDME-DS
FORT BELVOIR, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.