INCH-POUND

MIL-R-82200B
10 MAY 1989
SUPERSEDING
MIL-R-82200A
25 July 1980

MILITARY SPECIFICATION

RAMP, LOADING VEHICLE, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers lightweight towable loading ramps, for loading and unloading with forklift trucks between ground level and the floors of railcars, highway trucks, trailers and container vans. The ramps shall have a manually operated hydraulic system for vertical positioning.

1.2 Classification. Portable, loading vehicle ramps shall be of the following types and sizes as specified (see 6.2):

Type I - Aluminum with aluminum grating.

Type II - Aluminum with steel grating.

Size A - 16,000 pounds (7257.4 kg) capacity.

Size B - 20,000 pounds (9071.8 kg) capacity.

Size C - 24,000 pounds (10886.2 kg) capacity.

Style 1 - 70 inches (177.8 cm) wide.

Style 2 - 84 inches (213.3 cm) wide.

Style 3 - 96 inches (243.8 cm) wide.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: The Fitting Out and Supply Support Assistance Center, P.O. Box 15129, Norfolk, VA 23511-0129 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3990

Distribution Statement A. Approved for Public Release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the current version before use.

1.3 Part of Identifying Number (PIN). A Specification Based PIN to identify types, size and styles of items is included in Section 6.

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents. The following documents, of the issue in effect on date of invitation for bids or requests for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-C-320 - Chromium Plating (Electrodeposited)
QQ-S-781 - Strapping, Steel, and Seals.
RR-C-271 - Chains and Attachments, Welded and Weldless.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-G-3859 - Grease Gun, Hand Operated, Lever, Push and Screw Type
DOD-P-15328 - Primer (Wash), Pretreatment;, (Formula No. 117 for Metals).

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services
FED-STD-595 - Color (Requirements for individual color chips)

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-209 - Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, Pa 19120-5099.

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
ASTM D-3951 "Standard Practice for Commercial Packaging"
D-4174 "Practice for Cleaning, Flushing, and Purification of Petroleum Fluid Hydraulic Systems.
(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)
SAE Standard J534 (Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096).

TIRE AND RIM ASSOCIATION INC (TRA) TRA Yearbook
(Application for copies should be addressed to the Tire and Rim Association, Inc. 3200 W. Market St., Akron, OH 44313).

2.3 Order of Precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this text document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS.

3.1 First Article. The supplier shall furnish one ramp of each type, size and style being procured within the time frame specified in the contract, for examination and testing (unless indicted otherwise in the contract, see 6.2). These tests are to prove, prior to starting production, that his choice of design details and production methods will produce ramps that comply with the requirements herein. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the government. The first article shall be newly manufactured using the same design, material, methods, equipment and expertise of labor as the remaining ramps to be supplied under the same contract. Data or equipment from an earlier contract will not be accepted by the Government unless approved in writing by the Contracting Officer.

3.2 Standard product. The portable loading vehicle ramps covered by this specification shall be the manufacturer's current standard commercial product, except for any modifications required to comply with these specifications.

3.3 Material. Material shall be new and of a composition and quality suitable to meet the requirements specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.2). Recycled or recovered material may be used if

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the current version before use.

approved in writing by the contracting officer and if all requirements noted herein are met.

3.4 Design and construction. The ramps shall be designed and constructed Type II ramps shall have steel grating. Each ramp shall be designed to perform in accordance with the requirements of 3.8 for carrier floor heights from 38 inches (96.5 cm) to 62 inches (157.4 cm) above ground level. The overall length of the ramp shall be 36 feet (10.97 m) including a level-off section of at least 6 feet (1.83 m) at the top end. The upper end of the ramp shall have a solid lip of not less than 14 inches (35.6 cm) to support the ramp on the carrier floor. The ramp shall be equipped with handholds for positioning by four people manually to other locations over semi-improved surfaces. The ramp shall be equipped with two safety chains 8 feet (2.44 m) to 12 feet (3.66 m) in length with grabhooks to secure the ramp to the carrier or dock. The ramp shall be equipped with side mounted reflectors at each end. The ramp design shall provide for safety curbs to prevent run-off of operating equipment while on the ramp. The safety curbs shall have a minimum height of 4 inches (10 cm). The ramp shall have a capacity of 16000 (7257.4kg), 20,000 (9071.8kg) or 24000 pounds (10886.2kg) as specified in the contract (see 1.2) and be capable of withstanding 200 percent of the rated capacity. The wheels for moving the ramp shall be located at the center of balance underneath the ramp and shall be connected to the hydraulic actuating system so that the ramp can be utilized through the full height range without the wheels acting as load supports.

3.4.1 Surface. The surface of the grating shall be an "all weather" self-cleaning and draining type with the top surface fully serrated to provide traction for fork truck wheels under all weather conditions. When the Type II ramp is specified, the steel grating shall be galvanized by the hot dipped process or shall have two coats of a baked-on epoxy base synthetic finish (DOD-P-15328). The design shall provide safety side curbing to prevent equipment run-off without imparting tire or wheel damage. The approach at both ends of the deck shall consist of an integral safety tread plate. The approach edges of the tread plates shall be beveled. All other deck surfaces shall consist of open type grating. The grating holddown fasteners shall not project above the top surface of the grating.

3.4.2 Hydraulic System. Vertical positioning of the ramp through a range from 38 inches (96.5 cm) to 62 inches (157.4 cm) above ground level shall be accomplished by a manually operated hydraulic system. The system shall be capable of elevating the ramp through this range within 120 seconds. The hydraulic system shall incorporate an overload relief valve to protect the hydraulic system from damage due to overload. The pump level shall be recessed and positioned for ease of access and operation. The force at the grip end of the pump lever to operate the pump against relief pressure shall not exceed 50 pounds.

3.4.2.1 Components. The hydraulic system shall consist of hydraulic components properly designed for this application. The system shall include (but not be limited to) hand driven hydraulic pump, oil reservoir, valve, pressure relief system, and filter/strainer. Prior to first operation the hydraulic system shall be flushed and cleaned of all foreign matter and other contaminants as specified in ASTM D-4174. Pump reservoir and hydraulic system shall be capable of being drained without spillage. The storage reservoir, breather and filler cap, cylinders, hydraulic hand pump and other components shall be protected against damage through dirt or water contamination of the hydraulic fluid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

The reservoir shall be of welded steel construction with a capacity of not less than 110% of the amount of fluid required for hydraulic system operation.

3.4.2.2 Cylinder and position rods. Hydraulic system cylinders shall have an exclusion device to prevent foreign material and fluids from entering around with aluminum structural members. Type I ramps shall have aluminum grating. the piston rod. Piston rods for the hydraulic system shall be plated with an electrodeposited hard chrome finish of uniform thickness not less than 0.0005 inches (.00127 mm) in accordance with QQ-C-320. Rod surface roughness shall not exceed 32 microinches (.0000813 mm).

3.4.3 Wheels. Wheels shall be industrial or automotive type and shall be mounted on tapered roller bearings. Hub design shall provide a means to retain lubrication.

3.4.4 Tires. Each wheel shall be provided with a new, unused pneumatic tire. Tire loading shall not exceed that listed in the Tire and Rim Association latest Yearbook for the application.

3.4.4.1 Spring suspension system. A coil spring suspension system with hydraulic shock absorbers shall be provided to permit towing of the ramp at speeds up to 5 miles per hour (0.8 km/hr). Springs shall be pin connected to permit securing of undercarriage in the proper position for towing and for operation by one man without the use of tools. Means shall be provided to retain the wheels clear of the ground in the operating position.

3.4.5 Safety chains. Safety chains shall be provided on each side at the high end of the ramp to secure the ramp to the carrier. Each chain shall be not less than 8 feet (243.8 cm) in length and be equipped with a grabhook on one end and a shackle on the opposite end. Chain, shackle, and hook shall conform to RR-C-271, Type I, Grade C, Class 4 minimum 0.25 inch (.635 cm) nominal size; Type IV; and Type V, Class 1 and 2 respectively.

3.4.6 Tow bar. The loading ramp shall be equipped with a detachable tow bar for towing. The tow bar shall be equipped with a quicklock device for attachment to the ramp. The towing eye of the bar shall have a 3 inch minimum inside diameter and the center of the towing eye shall extend a minimum distance of 48 inches (121.9 cm) from the edge of the ramp. With the towing eye at a height of 28 inches (71.12 cm) the ramp shall be approximately level. The tow bar shall be stowed in brackets on the side or beneath the ramp where it shall be easily accessible. There shall be no evidence of permanent deformation of the tow bar or ramp or any loosening of connection between the tow bar and the ramp when the ramp is tested as specified in 4.5.2.5.

3.4.7 Grease fittings. Grease fittings shall be provided where required for lubrication or corrosion resistance, except where prelubricated sealed bearings are used. All fittings shall be of SAE Standard (J534) configuration and located in a protected yet easily accessible position for lubrication with a hand operated grease gun conforming to MIL-G-3859.

3.4.8 Finish. The safety curb and outside of ramp side beams shall be primed and painted. Primer shall be a wash primer in accordance with DOD-P-15328. The finish paint shall be a high visibility yellow color 13538 in accordance with FED-STD-595. Primer and finish coats shall be applied in accordance with normal commercial practices to assure complete coverage and

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the currentversion before use.

durability of the finish. The finish coat, when dry, shall be a smooth even surface, free from runs, sags, peels, chips, blisters, areas of thin film or no film. Paint shall be kept off working surfaces when interference with the working parts will result.

3.4.9 Welding. The surfaces of parts to be welded shall be clean and free from rust, scale, paint, grease and other foreign matter.

3.4.10 Fastening devices. All nuts, bolts, pins, and similar parts shall be installed with adequate means for preventing them from loosening or becoming out of adjustment. All fastening devices subject to removal or adjustment shall not be swagged, peeled, stacked, or otherwise permanently deformed. Threads shall conform to the applicable requirements of FED-STD-H28.

3.4.11 Brazing and soldering. Brazing and soldering shall be employed only where those operations are included in the original design. These operations shall not be employed as repair measures for defective parts.

3.4.12 Interchangeability. All parts from the same manufacturer shall be manufactured to such standards that will permit replacement or adjustment without modification of parts or total equipment.

3.4.13 Slinging provisions. Permanently affixed slinging provisions (Brackets) enable the ramp to be lifted in its normal travel position shall be provided and shall conform to MIL-STD-209.

3.5 Equipment manual. One copy of an equipment manual shall be furnished with each ramp. The equipment manual shall contain complete instructions for operation and maintenance. An illustrated repair parts list shall be furnished with a repair parts section that includes actual manufacturer's name and part number and quantity of each part required. The repair parts illustration may be a drawing or picture. Repair parts for the same or different model ramps shall not have the same part number unless the parts are interchangeable.

3.6 Identification plate. Each ramp shall be provided with an identification plate in accordance with MIL-STD-130. The identification plate shall include manufacturer's name, type, model or serial number, contract number, date of manufacturer and load capacity of the unit.

3.7 Workmanship. The ramps shall perform loading operations without permanent deformation, breakage of connections, malfunction, or component interference caused by incorrect workmanship. All parts of the ramp shall be clean and free from sand, rust, dirt, films, pits, sprues, scale, flux, and other harmful extraneous materials. Edges and surfaces exposed to operating and maintenance personnel shall be smooth and rounded to the extent that a hazardous surface does not exist.

3.7.1 Rivet Connections. Rivet holes shall be accurately punched or drilled, and shall have burrs removed. Rivets shall be driven with power tools. Rivet heads shall be full, neatly made, concentric with rivet holes and in full contact with the surface of the member. Excessive upsetting of rivets to fill holes will not be acceptable.

3.7.2 Bolted connections. Bolt holes shall be accurately formed and shall have burrs removed. Washers or lockwashers or a combination of the two shall be provided on all bolts, studs, and cap screws having straight thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Self-locking nuts are acceptable in lieu of standard nuts and lockwashers. All fasteners shall be correctly tightened and nuts shall have full thread engagement.

3.7.3 Welds. Welded joints shall be sound, smooth, free from pits, holes, fissures, rough projecting edges, and slag; and shall be thoroughly fused to the base metal.

3.7.4 Machine work. All parts shall be manufactured to insure accuracy of assembly through the use of correct jigs, fixtures or computer controlled machines or any combination thereof. Like parts shall be interchangeable.

3.8 Performance.

3.8.1 Structure. The ramp shall be capable of withstanding stresses up to 200% of rated capacity without permanent deformation or indications of material or workmanship defects when tested as specified in 4.5.2.1.

3.8.2 Hydraulic system. The hydraulic system shall show no evidence of leakage, malfunction, downward drift of more than 0.5 inch (1.27 cm), or permanent deformation when tested as specified in 4.5.2.1 and 4.5.2.2.

3.8.3 Towing operation. The ramp deck shall be capable of being towed with a vehicle having a pintle height of 28 inches (71.12 cm) with no evidence of permanent deformation or failure when tested as specified in 4.5.2.4.

3.8.4 Endurance. While elevated to maximum height the ramp shall be capable of withstanding, (without permanent deformation or any evidence of structural or mechanical damage, or hydraulic leakage), 3,000 cycles of maintenance free operation when tested as specified in 4.5.2.6.

4. Quality Assurance Provisions.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Lot. A lot shall consist of all items of one type, size and style offered for delivery at one time.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) First article inspection and test (see 4.3).

(b) Quality conformance inspection (see 4.4)

(c) Inspection of packaging (see 4.6).

4.3 First Article inspection. One ramp of each type and size shall be inspected to determine conformance with the examination of 4.5.1 and the test

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the currentversion before use.

of 4.5.2. Failure of any examination or test shall constitute failure of first article inspection. The failure analysis and proposed corrective action shall be submitted to the Contracting Officer for Navy approval and the first article inspection shall be successfully repeated on the redesigned ramp prior to further production of the redesigned ramp.

4.4 Quality conformance inspection.

4.4.1 Sampling. Each ramp shall be examined as noted in paragraph 4.5.1 following.

4.5 Inspection procedure.

4.5.1 Visual examination. Examination shall be in accordance with Table 1.

4.5.1.1 Defect Classification. Minor defects are those which can be easily repaired at the job site by the contractor. Major defects may require the contractor to return the ramp to the manufacturing plant for defect correction.

In either case (major or minor defects), corrective action is required by the contractor prior to Navy acceptance of the ramp(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS

Examine		Defects	Classification Major	Minor
1. Finish	A.	Surface preparation, treatment and primer not as specified.	X	
	B.	Finish not color specified.		X
	C.	Finish surface contains runs, sags, peels, chips, blisters, areas of thin film or no film.		X
2. Design	A.	Material not as specified.	X	
	B.	Dimensions not as specified.	X	
	C.	Wheels act as load supports within range of 38 inches to 62 inches.	X	
	D.	Approach edges of tread plates not beveled.	X	
	E.	Grating is not all-weather, self-cleaning, and draining type.	X	
	F.	Grating holddown fasteners project above top surface	X	
	G.	Pump not recessed in protected position.	X	
	H.	Pump lever socket not accessible.	X	
	I.	Cylinders not as specified.	X	
	J.	Tire loading exceeds tire manufacturer's recommendation.		X
	K.	Suspension not as specified.	X	
	L.	Means not provided to retain springs clear of the ground in operating position.	X	
	M.	No provision for slinging.	X	
	N.	Safety chains not as specified.		X
	O.	Quick-lock device not separable from tow bar without the use of handtools.	X	
	P.	Tow bar storage not as specified.	X	
	Q.	Grease fittings not as specified (SAEJ534)		X
	R.	Grease fittings not accessible.	X	
	S.	Screw threads not in accordance with FED-STD-H28.	X	
	T.	Fastening devices not as specified	X	
	U.	Assemblies not accessible for maintenance.	X	
	V.	No provision for handholds for positioning ramp.		X
3. Construction and Workmanship.				
	A.	Hydraulic system leaks		X
	B.	Sharp edges and burrs not removed.		X
	C.	Rivet connections not as specified.		X
	D.	Bolted connections net as specified		X
	E.	Welding not as specified.	X	
	F.	Component missing or damaged.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS

Examine	Defects	Classification Major	Minor
4. Instructions.			
	A. Identification plate missing, incomplete, or illegible.		X
	B. Equipment manual not furnished or incomplete.		X
5. Identification Marking			
	A. Missing, incomplete, not legible.		X

4.5.2 Performance tests. Prior to test, the sample ramp shall be lubricated with oils and greases as recommended by the supplier. Tests shall be conducted in the order listed.

4.5.2.1 Overload test. The assembled sample ramp shall be subjected to a static load of 200 percent of the rated load. The load shall be applied through an area extending no more than 9 inches (22.86 cm) on each side of the lateral centerline of the ramp. (The lateral centerline runs from side to side across the ramp, and is of equal distance from each end of the ramp.) The ramp wheels shall not act as load supports during the test. The ramp shall be left under this load for a period of 1 hour, after which the load shall be removed and the ramp them inspected to determine compliance with 3.8.1, 3.8.2 and Table I. Nonconformance to 3.8.1 and 3.8.2 or Table I shall constitute failure of this test.

4.5.2.2 Hydraulic test. After successful completion of the above tests, the ramp shall then be lowered to its lowest position. Then operate hydraulic system manually to raise the level platform of the ramp to its highest position within 120 seconds. Then the ramp shall be lowered to its lowest position which completes one cycle. The above cycle shall be performed for a total of 10 times at the fully raised position. After completion of the 10 cycles, all moving parts shall be examined for evidence of excessive wear to the operating mechanism. At the fully raised position, the ramp shall be held for a minimum two hour period. There shall be no leakage and the ramp shall not drift downward more than 0.5 inch (1.27 cm) during this period. Nonconformance to 3.8.2 or Table I shall constitute failure of the test.

4.5.2.3 Leakage test. At the completion of the above 10 cycles, the hydraulic components and lines shall be examined for leakage and damage. Nonconformance to 3.8.2 or Table I shall constitute failure of this test.

4.5.2.4 Towing test. The ramp shall be coupled to a towing vehicle and be towed over a hard surface secondary type road, including rough railroad crossings, at an average speed of not less than 5 mph (8.0 km/hr) for 3 hours. Nonconformance to 3.8.3 or Table I shall constitute failure of this test.

4.5.2.5 Tow bar test. With the ramp raised to towing height, and tow bar in place, the ramp shall be permitted to fall free to the ground. Repeat this test 10 times. Nonconformance to 3.4.6 shall constitute failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

4.5.2.6 Endurance. The ramp shall be elevated to maximum height and attached to a container or dock. A forklift truck compatible with the ramp shall be used for the test. Each cycle shall consist of a fully loaded truck of not less than 16,000 lbs (7257.4kg) total weight for size A ramp, 20,0001bs (9071.8kg) for size B ramp and 24,000 lbs (10886.2kg) total load for size C ramp ascending the ramp, depositing the load on the container or dock, descending the ramp, ascending the ramp, pick up the load and descend the ramp. A total of 3,000 cycles shall be performed. Nonconformance to 3.8.4 shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects:

101. Materials, methods, and containers not as specified for Level A. Each incorrect material, method, or container shall be considered one defect.

102. Bearings not lubricated as specified for Level A.

103. Hydraulic system not preserved as specified for Level A.

104. Consolidation not as specified for Level A.

105. Packing not as specified for Level A.

106. Marking missing, illegible, incorrect, or incomplete for Level A or Commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1.1 Preservations. Preservatives specified herein shall conform to the applicable specifications listed herein and shall be applied in accordance with MIL-P-116.

5.1.1.2 Unfinished surfaces. Exterior metal surfaces of components requiring the application of a contact preservative shall be coated with Type P-1 preservative.

5.1.1.3 Bearings. Bearings shall be lubricated to capacity with the manufacturer's recommended lubricant containing a rust inhibitor.

5.1.1.4 Hydraulic system. The hydraulic fluid supply tank shall be filled to the operating level with the hydraulic fluid required for operation. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

piston shall be retracted as far as practicable into the cylinder. When the piston cannot be fully retracted into the cylinder the exposed portion of the piston shall be coated with Type P-6 or P-11 preservative and the coated surface wrapped or covered with barrier material conforming to MIL-B-121, Type II, Grade A, Class 2, extending the wrap approximately 2 inches on the ram cylinder. The barrier material shall be secured in place with tape. The pump lever shall be secured in a manner to prevent movement.

5.1.1.5 Equipment manual. The equipment manual shall be preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.1.1.6 Consolidation. The equipment manual and any accessories or installation hardware shall be consolidated together in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional. The contents shall be blocked, braced, or cushioned as applicable within the box to prevent movement or damage.

5.1.2 Commercial. Each complete ramp shall be preserved in accordance with ASTM D-3951-82.

5.2 Packing. Packing shall be Level A or Commercial as specified (see 6.2).

5.2.1 Level A. The ramp shall be prepared for unboxed (mobile) shipment. The consolidation box shall be secured to the ramp in a protected location that will not interfere with the lifting or its mobility.

The securing shall be accomplished by the use of steel strapping conforming to QQ-S-781, Type I or IV, Finish B, size as applicable. The tow bar shall be stowed in brackets provided and if needed to prevent loss, secured in place with strapping herein.

5.2.2 Commercial. Each complete ramp shall be packed in accordance with ASTM D-3951-82.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection shall be accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D-3951-82.

6. NOTES

6.1 Intended use. The Style 1 portable loading ramp covered by this specification is normally used for loading and unloading with forklift trucks between ground level and the floors of railcars, highway trucks, or trailer equipment. The Style 2 ramp and the Style 3 ramp are normally used for container loading and unloading operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type, size, and style required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.


(c) When preproduction sample is not required (see 3.1).

(d) Schedule for submission of preproduction model, when required, (see 3.1).

(e) Degree of preservation and packing required (see 5.1 and 5.2).

6.3 First Article. Any changes or deviations of production ramps from the approved First Article Ramp during production will be subject to the approval of the contracting officer. Approval of the First Article Ramp will not relieve the supplier of his obligation to furnish ramps conforming to this specification.

6.4 Part of Identifying Number (PIN). The PIN to be used for Ramps acquired to this specification are created as follows:

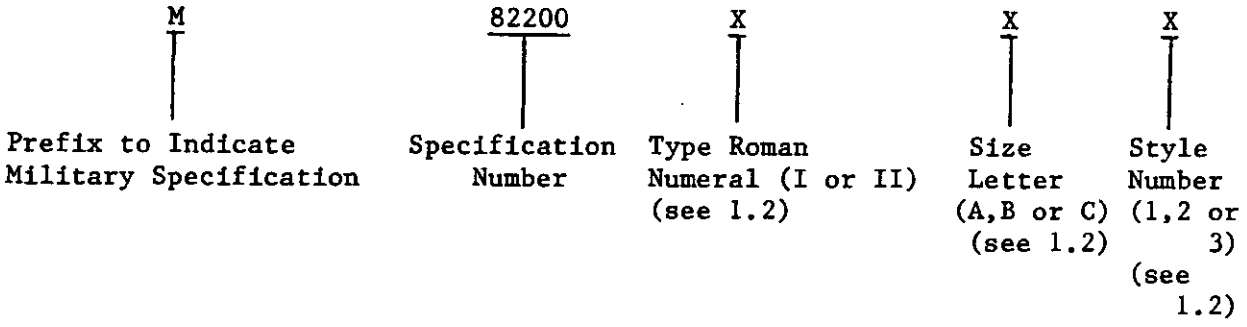

6.5 Subject Term (Key Word) Listing

(1) Ramp
(2) Loading Ramp
(3) Ramp Loading Vehicle
(4) Forklift Ramp
(5) Unloading Ramp
(6) Towable Ramp
(7) Hydraulic Ramp

Custodians:
Navy - SA

Review activity:
Navy - OS
DSA - GS

User activities:

Navy - SH, MC
Air force - 99

Preparing activity
Navy - SA

Project 3990-0206

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-82200B "RAMP, LOADING VEHICLE, GENERAL SPEC. FOR."

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

★ U.S. Government Printing Office: 1978—703-175/3081 2-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Fitting Out and Supply Support
Assistance Center
P.O. Box 15129
Norfolk, VA 23512-0129

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.