MILITARY SPECIFICATION

BAKERY OVEN, TRAILER MOUNTED, M-533

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a trailer-mounted, gasoline fired bakery oven.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

J-C-580	-	Cord, Flexible, and Wire, Fixture, (Electrical, 0 to 600-Volt Service).
W-F-406	-	Fittings for Cable, Power, Electrical and Conduit,
CC-M-1807	-	Motor, Alternating Current, Fractional and Integral Horsepower (500 hp and Smaller)
FF-H-111	-	Hardware, Builders'; Shelf and Miscellaneous.
FF-H-116	-	Hinges, Hardware, Builders.
HH-G-156	-	Gasket Material, General Purpose; Rubber Sheets, Strips and Special Shapes.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7310

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

HH-I-558	-	Insulation, Blocks, Boards, Blankets, Felts, Sleeving (Pipe and Tube Covering), and Pipe Fitting Covering, Thermal (Mineral Fiber, Industrial Type).
HH-M-351	-	Millboard, Asbestos.
MM-L-736	-	Lumber; Hardwood.
QQ-A-601	-	Aluminum Alloy Sand Castings.
QQ-B-626	-	Brass, Leaded and Non-Leaded; Rod, Shaped, Forgings, and Flat Products with Finished Edges (Bar and Strip).
QQ-I-652	-	Iron Castings, Gray.
QQ-S-698	-	Steel, Sheet and Strip, Low Carbon.
QQ-S-700	-	Steel, Sheet and Strip, Medium and High Carbon.
QQ-S-741	-	Steel, Carbon; Structural Shapes; Plates; and Bars.
QQ-S-763	-	Steel Bars, Wire, Shapes, and Forgings, Corrosion-Resisting.
QQ-S-766	-	Steel Plates, Sheets, and Strip, Corrosion-Resisting.
QQ-S-775	-	Steel Sheets, Carbon, Zinc-Coated.
QQ-W-412	-	Wire, Steel, Alloy (General Purpose Quality), for Mechanical Springs.
QQ-W-423	-	Wire, Steel, Corrosion-Resisting.
QQ-W-428	-	Wire, Steel, Carbon, (High Carbon, Round, for Mechanical Springs, General Purpose).
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated).
RR-C-271	-	Chains and Attachments, Welded and Weldless.
TT-E-529	-	Enamel, Alkyd, Semi-Gloss.
TT-P-636	-	Primer Coating, Alkyd, Wood and Ferrous Metal.
TT-P-664	-	Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
WW-C-566	-	Conduit, Metal, Flexible.
WW-P-406	-	Pipe, Steel (Seamless and Welded) (For Ordinary Use).
WW-P-460	-	Pipe Fittings; Brass or Bronze, (Threaded), 125 and 250 Pound.
WW-P-471	-	Pipe Fittings: Bushings, Locknuts and Plugs; Iron, Steel, and Aluminum; (Threaded); 125-150 Pounds.
WW-P-521	-	Pipe Fittings, Flange Fittings, and Flanges Steel, and Malleable Iron (Threaded and Butt-Welding) 150 Pound.
WW-T-799	-	Tube, Copper, Seamless, Water and Refrigeration (For Use with Solder Flared-or Compression-Type Fittings).
WW-V-54	-	Valve, Gate, Bronze (125, 150, and 200 Pound, Threaded Ends, Flange Ends, Solder End, and Brazed Ends, for Land Use.
PPP-T-60	-	Tape: Packaging, Waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	-	Preservation-Packaging Methods of.
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-B-543	-	Buckles, Tongueless and Web Strap.
MIL-P-551	-	Pipes and Elbows, Air Conditioning - Heating.
MIL-C-2221	-	Covers, Cotton Duck, Mobile Bakery Plant.
MIL-P-3852	-	Pans, Baking and Roasting, Corrosion-Resisting and Carbon Steel.
MIL-T-6737	-	Tubing, Steel, Corrosion and Heat Resisting (18-8 Stabilized) Welded.
MIL-S-7947	-	Steel, Sheet and Strip (1095) Aircraft Quality.
MIL-I-8574	-	Inhibitors, Corrosion, Volatile, Utilization of.
MIL-M-10578	-	Corrosion-Removing and Metal Conditioning Compound and Rust Remover (Phosphoric Acid Base).
MIL-H-13524	-	Hose Assemblies, Metal; Flexible, Fuel and Oil.
MIL-V-13811	-	Varnish, Waterproofing, Electrical, Ignition.
MIL-I-22110	-	Inhibitors, Corrosion, Volatile, Crystalline.
MIL-V-62038	-	Vehicles, Wheeled: Preparation for Shipment and Storage of.

STANDARDS

FEDERAL

FED-STD-595	-	Colors.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-461	-	Electromagnetic Interference Characteristics, Requirement for Equipment.
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-1474	-	Noise Limits for Army Material

DRAWINGS

ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

5-11-480	-	Bakery Oven Trailer Mounted, M533; Illustration and Piece List
5-11-481	-	Oven Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

(Figure 1, attached herewith, is a miniature copy of the issue of Drawing 5-11-480 in effect on the date of specification approval, and is for information only. The issue of the drawing referenced in the contract shall govern.)

PUBLICATIONS

DEPARTMENT OF THE ARMY TECHNICAL MANUAL

TM-10-410	-	Bread Baking
TM-10-7360-201-10	-	Operator's Manual Bakery Plant Mobile (NSN 7360-00-221-2418)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

UNDERWRITERS LABORATORIES INC. (UL)

Electrical Construction Materials List

(Application for copies of applicable standard should be addressed to Underwriters Laboratories Inc., 207 East Ohio Street, Chicago, IL 60611; 333 Pfingston Rd., Northbrook, IL 60062; 1285 Walt Whitman Road, Melville, L.I., NY 11749; or 1655 Scott Boulevard, Santa Clara, CA 95050, 2602 Tampa East Blvd., Tampa, FL 33619.)

AMERICAN SOCIETY FOR TESTING MATERIALS (ASTM)

A-296	-	Corrosion-Resistant Iron-Chromium, Iron-Chromium-Nickel, and Nickel Base Alloy Castings for General Application.
A-519	-	Seamless Carbon and Alloy Steel Mechanical Tubing.
A-575	-	Merchant Quality Hot-Rolled Carbon Steel Bars.

(Copies of ASTM standards may be obtained from the American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Loose-Leaf Section No. 6, Loading of Department of Defense, Material on Open Top Cars

(Copies of AAR publications may be obtained from the Association of American Railroads, 59 East Van Buren Street, Chicago, IL 60605.)

INTERSTATE COMMERCE COMMISSION PUBLICATIONS (ICC)

MOTOR CARRIER SAFETY REGULATIONS

(Application for copies ICC publication should be addressed to the Interstate Commerce Commission; Bureau of Motor Carrier, Washington, DC 20402, or the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA No. 70 - National Electrical Code

(Copies of publications of the National Electric Code may be obtained from the National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02110.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION STANDARDS (NEMA)

Standard Publication No. MG1-1963 - Motors and Generators

(Copies of publications of National Electrical Manufacturers Association (NEMA) Standards may be obtained from the National Electrical Manufacturers Association, 155 East 44th Street, New York, NY 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Alternate components. Components offered as equivalent to components specified hereinafter and on the referenced drawings as a specific manufacturer's part number or equal shall be functionally equal, of equal or better quality,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

with the manufacturer's part number identified. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other components, unless such modification or change is specifically approved by the contracting officer. Prior to manufacture of the first article, or if none is required, prior to commencing production, the contractor shall submit for the contracting officer's approval a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified above. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of first article manufacture and does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

* 3.2 Samples.

* 3.2.1 First article. When specified (see 6.2), the contractor shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3.1 and 6.3).

* 3.2.2 Initial production testing sample. When specified (see 6.2), the contractor shall furnish a sample for initial production inspection and approval (see 4.3.2 and 6.4).

* 3.2.3 Inspection comparison testing sample. When specified (see 6.2), the contractor shall furnish a sample for comparison inspection and approval (see 4.3.3 and 6.5).

3.3 Code and standards compliance.

3.3.1 UL, and NFPA compliance. The trailer mounted bakery oven shall comply with the following requirements of UL and NFPA No. 70, as applicable.

* 3.3.2 Code and standard certification. Prior to the approval of the first article, if one is submitted, or prior to the approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the bakery oven he proposes to furnish under this specification meets the requirements specified in 3.3.1.

* 3.3.2.1 UL. Acceptable evidence of meeting the requirements of UL shall be the UL label, or the UL listing mark, or a certified test report from a recognized independent testing laboratory, acceptable to the Government, indicating that the bakery oven electrical materials and components offered have been tested and conform to applicable UL standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

* 3.3.2.2 NFPA. Acceptable evidence of meeting the requirements of NFPA No. 70 shall be the manufacturers certified statement that the trailer mounted bakery ovens electrical components conform to the applicable requirements.

* 3.4 Materials and components. Materials and components shall conform to the requirements specified hereinafter. The materials shall conform to the applicable specifications, drawings, standards, and requirements specified hereinafter.

3.4.1 Aluminum castings. Aluminum castings shall conform to any temper of alloy 355 or 356 of QQ-A-601.

3.4.2 Brass. Brass rod shall be copper alloy No. 360 of QQ-B-626.

3.4.3 Pipe fittings.

3.4.3.1 Malleable iron. Malleable iron pipe fittings shall conform to type II of WW-P-521.

3.4.3.2 Bronze. Bronze pipe fittings shall conform to class A of WW-P-460 or type III of WW-P-471 as applicable.

3.4.4 Copper tubing seamless. Seamless copper tubing shall conform to type K or M of WW-T-799.

3.4.5 Castings.

3.4.5.1 Iron. Iron castings shall conform to class 30 of QQ-I-652.

3.4.5.2 Corrosion-resistant iron castings. Corrosion-resistant iron castings shall conform to alloy CK-20 specified in ASTM A-296.

3.4.6 Steel, corrosion-resisting.

3.4.6.1 Sheet and Strip. Corrosion-resisting steel, sheet, and strip shall conform to class 302, 304, or 430 of QQ-S-766.

3.4.6.2 Rod. Corrosion-resisting steel rod shall conform to class 304 of QQ-S-763.

3.4.6.3 Tubing. Corrosion-resisting steel tubing shall be welded and shall conform to MIL-T-6737.

3.4.6.4 Wire. Corrosion-resisting steel wire shall conform to QQ-W-423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.4.7 Carbon and alloy steel.

3.4.7.1 Sheet and strip. Sheet or strip steel shall be cold rolled, commercial quality (CRCQ) or hot rolled, commercial quality (HRCQ) conforming to QQ-S-698 or QQ-S-700. Grade and designations shall be as specified on drawings.

* 3.4.7.2 Bar. Bar stock shall be hot rolled machine steel conforming to ASTM A-575.

* 3.4.7.3 Tubing. Steel tubing shall be cold-rolled, finish annealed, conforming to ASTM A-519.

3.4.7.4 Pipe. Steel pipe shall be zinc coated conforming to WW-P-406.

3.4.7.5 Wire. Steel wire shall conform to QQ-W-461.

3.4.7.6 Galvanized steel sheet. Galvanized steel sheet used in finish sheet shall conform to class d of QQ-S-775.

3.4.7.7 Structural shapes. Steel angles and channels shall conform to QQ-S-741.

3.4.8 Spring steel.

3.4.8.1 Wire. Steel wire shall conform to QQ-W-412. Compression springs on the burners shall be fabricated from steel conforming to type I of QQ-W-428.

3.4.8.2 Strip. Spring steel strip shall conform to MIL-S-7947.

3.4.9 Insulation.

3.4.9.1 Asbestos millboard. Asbestos millboard shall conform to HH-M-351.

3.4.9.2 Sheet asbestos. Sheet asbestos shall be nonrubber bearing asbestos gasket material, conforming to HH-M-351.

3.4.9.3 Semi-rigid insulation. Semi-rigid insulation shall be blankets of fibrous glass, reinforced with metal mesh type 600 HO, faced on one side with galvanized poultry netting, 1-inch mesh, No. 20 steel wire.

* 3.4.9.4 Mineral wool. Mineral wool shall conform to form B, type I, class 8 of HH-I-558.

3.4.10 Rubber. Rubber gasket shall conform to class B of HH-G-156.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.4.11 Electrical.

3.4.11.1 Rubber insulated cable. The rubber insulated lead in cable shall be hard service cord, type SO, neoprene covered, 600 volts, number 12 American Wire Gage (A.W.G.) 4 conductor flexible stranded wire, conforming to J-C-580.

3.4.11.2 Wire insulated. Insulated wire shall be type RH, 600 volt, number 14 A.W.G. single conductor stranded wire.

3.4.11.3 Fittings. Fittings used in connection with cable shall conform to W-F-406.

3.4.11.4 Conduits. Flexible steel conduits shall conform to WW-C-566.

3.4.12 Webbing. The cotton webbing shall be olive drab, type III, class 4, conforming to MIL-W-530.

3.4.13 Buckles. Buckles shall be type II, class 3, style 4, size 1-1/2-inch of MIL-B-543.

3.4.14 Wood. The brush block holder specified on Drawing 5-11-896 shall be constructed of clear, straight-grained maple, conforming to MM-L-736.

3.4.15 Gate valve. The gate valve shall be 3/8-inch, brass wedge disc, conforming to WW-V-54.

3.4.16 Hardware.

3.4.16.1 Nuts, bolts, washers, rivets and screws. All nuts, bolts, washers, rivets and screws used in contructional areas adjacent to food preparation shall be corrosion-resistant steel (CRES) or chromium plated. Above components used in other constructional areas shall be steel, either zinc or cadmium plated.

3.4.16.2 Catch, hood. The hood catch specified on Drawing 5-11-528 shall be a commercial spring loaded type catch and shall be zinc or cadmium plated.

3.4.16.3 Pull, screen door. The screen door pull specified on Drawings 5-11-529 and 5-11-530 shall conform to type F-1269 of FF-H-111.

3.4.16.4 Hinges. Hinges shall conform to type 2176 of FF-H-116.

3.4.16.5 Hinge, hasp. The hinge hasps specified on Drawings 5-11-529 and 5-11-530 shall have steel pins and conform to type F-1405C of FF-H-111.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.4.16.6 Chain. Chain shall conform to type II of RR-C-271.

3.4.17 Hose, metal. The flexible metal fuel hose shall conform to MIL-H-13524, and shall be 3/16 inch, inside diameter.

3.4.18 Pipe, stove. Stove pipe shall conform to MIL-P-551.

3.4.19 Cover, canvas. The canvas cover shall conform to type III of MIL-C-2221.

3.4.20 Spare parts box. The spare parts box shall be constructed in accordance with Drawings 5-11-524 and 5-11-525, and placed in the spare parts cabinet.

3.4.21 Paints and compound.

3.4.21.1 Compound. All surfaces to be painted shall be prepared with a compound conforming to MIL-C-10578.

3.4.21.2 Primer. Primer shall conform to TT-P-636.

3.4.21.3 Enamel. Enamel shall conform to TT-E-529. The color shall be olive drab No. 24087 conforming to FED-STD-595.

3.4.21.4 Sealing compound. Sealing compound shall be room temperature vulcanize silicone rubber adhesive compound.

3.5 Design and construction. The bakery oven and components thereof shall be designed and constructed as specified herein and as shown on the drawings listed on Drawing 5-11-480. The design shall provide for flue gas recirculation to the combustion chamber. The oven shall be provided with a dial thermometer to indicate internal temperature, which shall not fog when tested as specified in 4.6.4 and 4.6.5, and shall also be provided with a signal light to indicate that the burner is on high fire, when tested as specified in 4.6.5. The oven shall have two decks and shall have a capacity of 36 bread pans. The pans shall hold six 2-pound (0.91 kg) bread loaves each and shall conform to MIL-P-3852. The completely finished oven shall be assembled to the trailer chassis specified in 3.8 and be provided with a spare parts box as specified in 3.4.20 and a canvas cover as specified in 3.4.19.

3.5.1 Operating characteristics. The completely assembled bakery oven shall be capable of continuous operation when tested as specified in 4.6.2. All parts and controls shall function as intended when tested as specified in 4.6.2. The difference in total carbon dioxide (CO_2) content of the gas in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

heater firing tunnel and that in the exhaust stack shall not be more than 2 percent when tested as specified in 4.6.3. There shall be a minimum of 9 percent CO_2 in the gas samples taken in either location when tested as specified in 4.6.3. Heat shall be regulated and distributed by the adjustment of dampers. The temperature difference between any two points in each of the baking compartments shall not exceed 10°F (5.5°C) when tested as specified in 4.6.5. The dampers shall be tack welded in position when the specified heat distribution has been attained.

3.5.2 Performance. The completed oven shall be capable of satisfactorily baking one full load of bread in compliance with TM 1-410 without evidence of malfunction or failure of the oven or of any component when tested as specified in 4.6.9.

3.5.3 Framework. The framework and oven inner and outer sheets shall be fabricated and assembled as specified on the applicable drawings. The oven inner liner shall be air tight to reduce heat loss and shall show no evidence of air or gas leakage when tested as specified in 4.6.3 and 4.6.4. All doors shall be squarely hung and shall operate smoothly with all locking devices in good working order when tested as specified in 4.6.2. Welding and brazing shall be as specified in 3.9.3. All joints and seams, where oven and chassis join, shall be sealed with the sealing compound specified in 3.4.21.4. Upon completion, the entire oven and framework, where attached to trailer, shall be rigid with no loose or incomplete parts, when tested as specified in 4.6.1, 4.6.1.1 and 4.6.1.2.

3.5.4 Pressure relief. The oven shall be equipped with replaceable pressure relief sheets as specified on Drawing 5-11-528.

3.5.4.1 Pressure relief instruction plate. Oven pressure relief instructions shall be as specified on Drawing 5-11-528. An instruction plate as specified in 3.7 shall be securely fastened in the location shown on the drawing.

3.5.4 Recirculating blower. The blower shall be as specified on Drawing 5-11-483. An etched plate, indicating the direction of rotation specified on the drawing shall be mounted in the blower recess. The asbestos gasket between the combustion tunnel flange and the oven and the gasket between the burner head plate and the combustion tunnel flange shall be installed so as to prevent air leakage into the combustion chamber when tested as specified in 4.6.3. The blower shall be fitted with a turned ground shaft, having sheaves for belt drive and supported as detailed on drawings. The bearing support shall be insulated at all points where direct contact with heat is encountered using the asbestos millboard specified in 3.4.9.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.5.5.1 Blower motor. The blower motor shall be 3-phase, type II, class 3, style E, design M, 208 volt 60 Hertz (Hz), continuous duty, class B insulated, ball bearing, 1-1/2 horsepower, 1725 revolutions per minute, design A as specified in CC-M-1807. Rotation shall be counter clockwise facing the end opposite the driving end. The motor shall be removable for storage in the spare parts cabinet.

3.5.6 Conveyor. Each oven shall be equipped with four endless chain conveyors. Each conveyor shall be independent of the others and equipped with takeup. Sprockets shall be according to dimensions shown on drawings. Chains shall be 3/4-inch (19 mm) pitch roller chain having extra clearance for temperatures from 400 to 500°F (204.4 to 260°C). The load of the trays and conveyor assemblies shall be carried on supports securely attached to the frame and provisions shall be made for expansion and contraction of the chains. All conveyors shall work smoothly and freely when tested as specified in 4.6.2.

3.5.7 Control panel. Each oven shall be equipped with a control panel, which shall have an indicating type temperature controller with a range of 100°F to 600°F (38 to 316°C). A manual starting switch for the blower motor and toggle switches for the burner and oven lights shall be provided. All switches shall be marked for identification with decals or marking strips. Details of installation and assembly of panel shall be as specified on the applicable drawings.

3.5.7.1 Temperature controller. The temperature controller shall be equipped with a corrosion-resisting steel bulb. The tube shall be of a length sufficient to allow installation within the return duct.

3.5.8 Burner. The oven shall be equipped with a gasoline burner. The burner shall have a lighter, attached to the burner by a chain, and a lighter snuffer. Installation of the burner shall allow for removal and storage in the spare parts cabinet. A cover, constructed as specified on applicable drawings together with mounting clips, shall be provided for the burner recess opening when the burner is not in the operating position. Mating surfaces of the combustion ring and vaporizing cup, shall be fabricated from corrosion-resistant iron as specified in paragraph 3.4.5.2 and the burner adapter shall be flat and smooth, obtained by grinding or machining. The burner shall be bolted with spring cushioned bolts to the hinged burner plate with spacers between the support ring and the hinged burner plate. The burner and the blower motor shall be attached to the oven during assembly to assure proper fitting and spacing. When the burner is mounted to the oven, and in a closed position, the adapter and the combustion ring shall fit tightly together and compress the springs on the burner. A flexible gasoline hose, 24 inches (610 mm) long as specified in 3.4.17, shall be used for connecting the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

inlet of the burner oil filter to the fuel tank supply line. Hose shall be complete with brass female couplings for connecting hose to fuel filter and to the fuel supply line. The fuel level control shall have a rubber overflow hose as specified in table I. The solenoid gasoline valve shall contain an integral, manually adjustable, metering valve cast in the main solenoid valve body. (1) The metering valve shall provide manual bypass control of fuel flow through the valve independent of solenoid action and shall be designed to permit adjustment of fuel from 0.0 to 0.5 gallons of gasoline per hour (0 to 0.5 ml/s) with 5/8-inch (16 mm) supply head. (2) The main valve parts shall be designed to pass a maximum of 2 gallons of gasoline per hour (2 ml/s) with a 5/8-inch (16 mm) supply head. The metering stem shall be slotted for turning with screwdriver and shall be held in place by a locknut arrangement. (3) When tested as specified in 4.6.6 at maximum fuel rate flow at high fire, all fuel lines shall be tight, clean and the burner solenoids shall operate. An instruction plate as specified in 3.7 shall be attached as shown on Drawing 5-11-517, with the following instructions.

DO NOT LIGHT HOT BURNER

Lighter Port Must be Kept Closed During Operation

Clean Out Oil Line Weekly

3.5.9 Pipe, stove. The oven shall be furnished with five straight sections and two 90 degree elbow sections of the stove pipe specified in 3.4.18. Pipe shall be removable and stored in the spare parts cabinet.

3.5.10 Wiring.

3.5.10.1 Cable. A lead-in cable 50 feet (15 m) long as specified in 3.4.11.1 shall be attached to the control panel. The cable shall be fitted with male plugs suitable for insertion into the control panel shown on Drawing 5-11-534. The plug shall have a rubber grommet suitable for a cable with a nominal diameter of 0.657-inch (1.67 cm).

3.5.10.2 Method of wiring. The oven shall be wired in accordance with the applicable drawings and the requirements specified herein.

3.5.10.3 Wiring diagram and operating instructions. The wiring diagram and operating instructions shall be as shown on Drawing 5-11-534 and the plate shall be as specified in 3.7. The plate shall be securely riveted to the inside surface of the control panel door. Diagrams and instructions on the plate shall be legible from a distance of 4 feet (1.2 m) when observed from the burner level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.5.11 Insulating. Each oven shall be insulated as specified on the applicable drawings and as specified herein. The asbestos millboard specified in 3.4.9.1 shall be used for insulating headers, pressure relief frames, burner head plates and blower bearings. The sheet asbestos specified in 3.4.9.2 shall be used as gasket material for the supports, combustion tunnels and oven lights. The semi-rigid insulation specified in 3.4.9.3 shall be used between the outside surfaces of the baking chambers and the oven superstructures. The mineral wool specified in 3.4.9.4 shall be used to fill the voids and spaces that cannot be filled with the semi-rigid insulation specified in 3.4.9.3.

3.5.12 Electromagnetic compatibility. Equipment procured under this specification for the Army shall be designed and equipped, for electromagnetic compatibility in accordance with class II B of MIL-STD-461 when tested as specified in 4.6.7.

* 3.5.13 Noise limits. The oven shall not exceed 85 decibels A-weighted at the normal operator position(s) when tested as specified in 4.6.10.

3.5.14 Finish. Exterior and inner surfaces of the oven and the inner surfaces of oven light doors, control panel door, bearing cover, and parts cabinet doors shall be finished in the following mannner.

3.5.14.1 Surface preparation. Steel, terne plate, and corrosion-resisting steel surfaces shall be prepared for painting by cleaning and conditioning with the compound specified in 3.4.21.1. Zinc coated surface shall be prepared for painting by thorough cleaning, followed by a phosphate treatment of a type which deposits a water insoluble, adherent (nonpowdery) phosphate film.

3.5.14.2 Priming. Surfaces normally painted after surface preparation specified in 3.5.13.1 and before the surfaces can corrode or pick up dust, dirt, oil, or other foreign matter, shall be coated with primer specified in 3.4.21.2.

3.5.14.3 Enameling. After primer has dried, primed surfaces shall be coated with the enamel as specified in 3.4.21.3.

3.5.15 Registration number. The registration numbers furnished by the contracting officer (see 6.2) shall be painted in 3-inch block letter's and figures on the chassis in three places using white lusterless synthetic, stenciling enamel.

3.6 Marking for identification. Identification markings shall be on a corrosion-resisting steel plate in accordance with MIL-STD-130. In addition the following shall appear on the plate:

Gross weight	lbs (kg)
Maximum speed	35 m.p.h. (56 km/h)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.7 Instruction plates. Instruction plates shall be of corrosion-resisting steel having a finished thickness of not less than 20 gage (0.025) (.063 cm). The information shown on applicable drawings shall be etched, embossed, die stamped or photographed on the plate in legible characters. The plates shall be of the size and in the locations specified on Drawings 5-11-481, 5-11-528 and 5-11-534.

3.8 Government furnished property. The components and publications, listed in table I will be furnished to the contractor by the Government (see 6.2) and shall form part of the trailer mounted bakery oven covered by this specification.

TABLE I. Government furnished property

Item No.	Quantity	Nomenclature
1	1	Trailer Chasses, Ordnance type M-537
2	1	Lubricating Order number 10-7360-201-20-5
3	1	Hose Assembly, Rubber, Utility, Gasoline (1/4-inch inside diameter)

3.9 Workmanship. Painted enameled or varnished surfaces shall be smooth, uniformly coated, free of runs, wrinkles, orange peel, grit, or areas of no film.

3.9.1 Metal fabrication. All rough and sharp edges shall be removed. Surface finish of machined parts shall not adversely affect proper alignment or functioning of mating parts. Shearing shall be neat and accurate.

3.9.2 Riveting and bolting. The holes for riveting and bolting shall be punched or drilled and all burrs shall be removed. Rivets, when driven, shall have the heads in full contact with the surface of the metal. All bolts shall be drawn tight.

3.9.3 Welding and brazing. The surfaces of parts to be welded or brazed shall be free of oxide, scale, paint, grease and other foreign matter. Welding and brazing shall be continuous, sound, smooth and free from porosity, cracks, incomplete fusion and deformation of material. All scale and flux deposits (when flux is used) shall be removed, and rough edges and projections shall be dressed smooth.

3.9.4 Solder and brazing. Surface of parts soldered or brazed shall be free of flux, scale, grease or foreign matter.

3.9.5 Threads and threaded fasteners. Threads shall not be missing, broken, stripped or fractured. Threaded fasteners shall not be loose, broken or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

3.9.6 Electric wiring. Electric wiring shall have no loose connections or terminals. There shall be no evidence of cutting, abrading or excessive stripping of insulation. Adequate slack shall be provided to relieve strain on all wiring.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3.1)
2. Quality conformance inspection (see 4.4)

* 4.3 Sample inspection.

* 4.3.1 First article inspection. When a first article is required, the range shall be examined for the defects listed in table IV dimensions specified and tested as specified in 4.6.1 through 4.6.7, and 4.6.9 and 4.6.10. Failure to pass any test shall be cause for rejection of the first article. The presence of any defects listed in table or any dimension not within specified requirements shall also be cause for rejection of the first article.

* 4.3.2 Initial production sample inspection. When an initial production sample is required, the bakery oven shall be examined for the defects in table IV, dimensions specified and tested as specified in 4.6.1 through 4.6.7 and 4.6.9 and 4.6.10. The presence of any defect or any dimension not as specified, or failure of any test shall be cause for rejection of the initial production sample.

* 4.3.3 Comparison sample inspection. When a comparison sample is required, the bakery oven shall be examined for the defects in table IV, dimensions specified and tested as specified in 4.6.1 through 4.6.7 and 4.6.9 and 4.6.10. The presence of any defect or any dimension not as specified, or failure of any test shall be cause for rejection of the comparison sample.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection.

4.4.2.1 In-process examination. Examination shall be made at appropriate stages of the manufacturing process to establish that the operations and processes listed in table III are accomplished as specified. Wherever nonconformance is noted, correction shall be made to the items affected and to the operations:

TABLE III. In-process examination

Operation	Requirement paragraph
Sealing. Oven-chassis joints sealed with room temperature vulcanize silicon rubber adhesive compound specified in	3.5.3
Burner and blower motor attached during assembly as specified in	3.5.5
Insulation. Oven insulated with insulation as specified in	3.5.11
Painted surfaces finished as specified in	3.5.13 3.5.13.1 3.5.13.2 and 3.5.13.3

* 4.4.2.2 In-process testing of the heating unit welds. Each assembled heating unit shall be tested for weld leakage as specified in 4.6.8. Any nonconformance with specified requirements shall constitute failure of this test.

4.4.3 End product inspection. A lot shall consist of all complete trailer mounted bakery ovens offered for inspection at one time. The sample unit shall be one complete trailer mounted bakery oven.

4.4.4 Visual examination. On completion of the tests itemized in 4.6.1, 4.6.1.1 and 4.6.1.2, a visual examination shall be made of the completely assembled end item for the defects specified in table IV. The inspection level shall be level II with an AQL of 6.5 total and 4.0 minor defects expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Painted, enameled or varnished surfaces not smooth, uniformly coated, or free of runs, wrinkles, orange peel, grit, or areas of no film.		X
Construction and workmanship	Roughness or sharpness on edges or corners not dressed smooth.	X	
	Surface finish of mating machined parts adversely affecting proper alignment of functioning metal components.	X	
	Burrs interfering with seating of bolts or rivets.		X
	Holes for riveting and bolting not accurately punched or drilled.	X	
	Shearing not neat and accurate.	X	
Welding and brazing	Not continuous, sound, smooth, free from porosity, cracks, incomplete fusion, or deformation of material	X	
	Surfaces of welded or brazed parts not free of oxide, paint, grease, scale or other foreign matter.		X
Soldering and brazing	Flux, scale, grease, or other foreign matter not removed from surface of metal.	X	
Threads	Missing, broken, stripped or fractured.		X
Threaded fasteners	Loose, broken or missing.	X	
	Bolts not drawn up tight.		X
Rivets	Not concentric with the hole	X	
	Not in full contact with the surface of the metal.		X
Oven doors	Not squarely hung or smooth in operation.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Framework	Not rigid.	X	
	Loose or incomplete parts.	X	
Recirculating blower	Rotation plate missing.		X
	Asbestos gasket missing.		X
	Bearing supports not insulated.	X	
Conveyors	Not independent endless chain type.	X	
	Not equipped with takeup.	X	
	No load supports attached to frame.	X	
	Not smooth in operation.	X	
Control panel	No indicating type temperature controller.	X	
	Temperature control range other than 100 to 600 F (38 to 316 C).	X	
	Switches not marked for identification.	X	
Burner	Lighter, snuffer or chain missing.	X	
	Burner recess cover missing.	X	
	Burner does not mount tightly.	X	
	Gasoline hose or filter missing.	X	
	Overflow hose on fuel level control missing.		X
Pipe-stove	Less than 5 pipe sections and 2 elbows.	X	
Wiring	Not wired in accordance with applicable drawing.	X	
	50 ft. (15 m) lead-in cable missing.	X	
	Lead-in cable other than 30 amp-208V.	X	
	Loose connection or terminal.		X
	Adequate slack not provided to relieve strain on wiring.	X	
Operating instructions	Missing or illegible.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Marking for identification and instruction plate	Missing, incomplete, not legible.		X
	Not specified type or size, not in proper location, not affixed in prescribed manner, not of specified material.	X	
Canvas cover	Missing or damaged.		X
Lubrication	Lubrication means not provided for bearings and other points requiring lubrication.	X	
	Lubrication points not accessible.	X	
	Points located where grease may come in contact with the dough.	X	
	Lubrication istruction missing.	X	
Safety chains	Not secured.		X
	Missing.	X	

* 4.4.4.1 Dimensional examination. Examination shall be made of the ovens for compliance with dimensions specified. Any nonconformance to specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.4.4.2 End item testing. When a first article, or initial production testing or comparison sample is not required, the initial production unit shall be tested in accordance with 4.6.1 through 4.6.2, 4.6.7, 4.6.9 and 4.6.10 with no evidence of failure. In addition, each end item shall be tested in accordance with 4.6.3 through 4.6.6 with no evidence of failure.

4.4.5 Examination of packaging. Examination shall be made to determine preservation-packaging is in accordance with MIL-P-116 and Section 5 of this specification. Examination for packing and marking shall be in accordance with Section 5.

* 4.5 Certificate examination. Certificate of compliance, certified test reports, approved labels or listing marks for code and stands, as applicable, that are submitted as proof of compliance with the specification requirements shall be examined and validated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

4.6 Tests.

* 4.6.1 15-mile (24 km) road and terrain. The end item, mounted on the Government furnished trailer, shall be towed fully loaded over not less than 5 miles (8 km/h) of paved roads at speeds up to 50 miles per hour, (m.p.h.), (80.45 km/h) as road and weather conditions permit; over not less than 5 miles (8 km/h) of graveled roads at speeds averaging 35 m.p.h. (56 km/h); and over not less than 5 miles (8 km/h) of open terrain at speeds averaging 5 m.p.h. (8 km/h); to determine conformance with the rigidity requirements of 3.5.3. Any nonconformance with the rigidity requirements specified shall constitute failure of this test.

* 4.6.1.1 Paved and graveled roads. The paved and graveled road tests shall each include not less than 20 quick starts and stops on grades of not less than 5 percent or greater than 10 percent. Fifty percent of the starts and stops shall be made on ascending grades and 50 percent on descending grades to determine conformance with the rigidity requirements of 3.5.3. Any nonconformance with specified requirements shall constitute failure of this test.

* 4.6.1.2 Open terrain. The open terrain shall have surface irregularities such as pot holes, mounds, rocks, and brush, randomly spaced. The test drive shall include 10 abrupt stops, 10 abrupt starts; and 10 sharp left hand turns and 10 sharp right hand turns to determine conformance with the rigidity requirements of 3.5.3. Any nonconformance with specified requirements shall constitute failure of this test.

* 4.6.2 Operational test. The oven shall be heated to an internal temperature of not less than 360°F (182.2 C) as indicated on the dial thermometer, for one hour to determine compliance with the temperature and operation requirements of 3.5.1. All doors, switches, conveyors and manually operated controls and temperature controllers signal lights and temperature indicators including the fog proof dial thermometer shall be operated and observed during the test to determine compliance with the requirements specified in 3.5.1, 3.5.2 and 3.5.3. Any noncompliance with specified requirements shall constitute failure of this test.

* 4.6.3 Air dilution test. A test shall be made for air leakage from the oven into the negative pressure area of the combustion system to determine conformance with the thermal efficiency requirements of 3.5.1 and the air-tightness requirements of 3.5.1 and 3.5.4. The temperature controller shall be set at 500°F (260°C) and the oven fired at a stabilized and constant fuel feed rate of 1.5 gallons (1.5 ml/s) of leaded gasoline motor fuel per hour for not less than 30 minutes. Gas samples from the combustion chamber area shall be drawn from the plenum chamber at the burner end of the heater firing tunnel at a point located approximately 26 inches (660 mm) from the flame sight hole and as specified in 4.6.3.1. The gas sample from the stack shall be taken at a point 4 inches (101.6 mm) above the return header stack. Samples shall be taken simultaneously. Any nonconformance with the specified requirements shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

4.6.3.1 Sampling methods in heater firing tunnels. A sample of flue gas shall be taken through the flame right hole of the plenum chamber at the burner end of the heater tunnel, and also in the heater tunnel at a point not more than 4 inches (101.6 mm) from the tunnel exit by means of a straight-tube protected from the burner flame in a manner that will insure correct CO_2 readings.

* 4.6.4 Exhaust gas leakage test. A test shall be made for exhaust gas leakage into the oven to determine conformance with the air-tightness requirements of 3.5.3. The oven shall be fired at a fuel rate which will give positive evidence of smoke from the exhaust stack. While operating under this condition visual examination shall be made for smoke leakage into the oven. Any noncompliance with the air-tightness requirements specified shall constitute failure of this test.

* 4.6.5 Heat distribution test. The oven shall be tested for proper heat distribution in accordance with 3.5.1. The heat shall be regulated by the adjustment of dampers. Four thermocouples shall be placed approximately 3 feet (.9 m) from each oven door. Individual thermocouples shall be spaced 1-foot (.3 m) apart. When the oven temperature is between 500°F (260°C) and 575°F (302°C) a series of readings shall be taken on a standard pyrometer. The high fire signal light and the fog proof dial thermometer (see 3.5) shall be checked for proper operation and accuracy and the fog proof dial checked for fogging. When adjusting dampers, it is necessary to allow sufficient time between readings for the heat of the oven to regain proper flow. When proper heat distribution has been accomplished, and all necessary adjustments to the instrumentation made, all dampers shall be tack welded into permanent positions. (Individual thermocouples may be attached to a top switch box with one set of leads to pyrometer and by this means a series of readings can be taken very quickly.) Any noncompliance with the heat-distribution requirements specified shall constitute failure of this test.

* 4.6.6 Burner test. The burner shall be operated at the maximum fuel rate as specified in 3.5.8 to determine compliance with (1) The manual bypass control and adjustability of fuel flow through the metering valve independent of solenoid action, (2) The fuel flow, metering, adjustability and locking requirements of the main fuel level control valve, and (3) The tightness, cleanliness, and freedom of fuel flow through the lines and filters and the bypass requirements of solenoid valve. Any noncompliance with maximum fuel rate requirements specified shall constitute failure of this test.

* 4.6.7 Electromagnetic compatibility test. When electromagnetic compatability is required, the first article or the initial production unit, as applicable, shall be tested by the contractor in accordance with test method CE03 and RE02 of MIL-STD-462. The Government reserves the right to witness tests performed

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

by the contractor or an independent testing agency. The contractor shall furnish the contracting officer written certification that the interference control plan, the EMI/EMC test plan, the electromagnetic test report and the requirements meet MIL-STD-461. Any nonconformance with specified requirements shall constitute failure of this test.

* 4.6.8 Weld leakage test. Prior to being included in the superstructure, and before installation, each assembled heating unit shall be tested for weld leakage to determine conformance with the air-tightness requirements of 3.5.3. All openings, with the exception of the air inlet port, shall be closed and a positive air pressure shall be developed and maintained inside the burner unit. A soap solution shall then be applied to all welded joints. All leaks detected shall be sealed. Any nonconformance with specified requirements shall constitute failure of this test.

* 4.6.9 Performance test. The oven shall be set up and operated in accordance with the applicable instructions of TM 10-7360-201-10. A full oven load shall be baked and examined to determine compliance with the capacity and satisfactory baking requirements of 3.5.2. The oven load shall consist of 36 pans, each pan containing six 2-pound (91 kg) molded doughs prepared in accordance with the formula for field garrison sheet bread of TM 10-410. During the test, the oven shall be observed for evidence of malfunction or failure of the oven or any component to determine compliance with the performance requirements of 3.5.2. Any noncompliance with specified requirements shall constitute failure of this test.

* 4.6.10 Noise test. The oven shall be tested in accordance with MIL-STD-1474 to determine conformance with 3.5.1.3. Any nonconformance with specified requirements shall constitute failure of this test.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Preservation. All exposed, uncoated, unpainted ferrous metal surfaces of the unit, including detached components shall be cleaned process C-1 and thoroughly dried in accordance with MIL-P-116. Unless otherwise specified hereinafter, all cleaned exposed and unpainted noncontacting ferrous metal surfaces (surfaces that do not contact other surfaces in operation) of the unit, including detached components, shall be coated with type P-1 preservative, conforming to MIL-P-116, and all exposed uncoated unpainted ferrous metal contacting surfaces (surfaces that contact other surfaces in operation, such as pan chains), of the unit including detached

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

components shall be coated with preservative conforming to type P-6 of MIL-P-116. Surfaces preserved with type P-6 preservative shall be covered or wrapped with greaseproof barrier-material conforming to type I or II, grade A, class 2 of MIL-B-121. The barrier-material shall be sealed with tape conforming to type IV, class 1 of PPP-T-60.

5.1.1.1.1 Stovepipe and elbows. Stovepipe and elbows shall be preserved in accordance with the level A requirements of MIL-P-551.

5.1.1.1.2 Gasoline tank. After draining, the interior of the gasoline tank shall be fogged with type P-10 preservative conforming to MIL-P-116. The interior of the tank shall then be pressure fogged with volatile corrosion crystals conforming to type I of MIL-I-22110, applied in accordance with MIL-I-8574. The cap shall be replaced and the breather hole sealed with tape specified in 5.1.1.1 and all exposed surfaces of the tape shall be coated with varnish conforming to MIL-V-13811.

5.1.1.1.3 Pulleys. The belt contacting surfaces of pulleys shall be coated with primer conforming to TT-P-664, thoroughly dried and the belt shall be stored in the compartment with the motor.

5.1.1.2 Lubrication. The chassis and any other parts of the unit, and detached components requiring lubrication shall be lubricated to capacity with the manufacturer's recommended lubricant containing a rust inhibitor.

5.1.1.3 Packaging.

5.1.1.3.1 Stovepipe and elbows. Five stovepipes and two elbows, preserved as specified in 5.1.1.1.1, shall be wrapped with barrier material as specified for preserved surfaces in 5.1.1.1.

5.1.1.3.2 Instruments, gages, switches. Faces of all instruments, gages, and switches shall be cushioned and the cushioning held in position and covered with tape specified in 5.1.1.1.

5.1.1.3.3 Spotlights. Spotlights, taillights, reflectors and electrical outlets, shall be covered with tape specified in 5.1.1.1.

5.1.1.3.4 Electric cable and hose. The electric cable shall be coiled and tied with cotton tape. Connectors, receptacles, terminals, and hose fittings shall be taped with tape specified in 5.1.1.1. The taped items shall be coated with varnish as specified in 5.1.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

5.1.1.3.5 Spare parts box. The spare parts box shall then be latched and placed into the spare parts cabinet on the right side of the trailer. Detached components, such as stovepipes and elbows, preserves and wrapped as specified herein, shall be placed together with the power cable into the same cabinet. The cabinet shall then be closed.

5.1.1.3.6 Burner. The burner, preserved as specified herein, shall be strapped in its respective place within the spare parts cabinet on the left side of the trailer. The blower motor shall be bolted in location provided within the spare parts cabinet.

5.1.1.3.7 Doors and openings. All doors and panels into the trailer shall be securely closed and all opening, crevices into the unit, shall be sealed with tape specified in 5.1.1.1, and coated as specified in 5.1.1.1.2.

5.1.1.3.8 Safety chains. The safety chains shall be secured to the drawbar with minimum 0.057-inch (.14 cm) diameter annealed wire. The landing gear and jacks shall be secured in place.

5.1.2 Commercial. Each bakery oven and components shall be preserved-packaged to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets these requirements.

5.2 Packing. Packing shall be level A.

5.2.1 Level A.

5.2.1.1 Railway shipment. For railway shipment, tire pressure shall conform with MIL-V-62038. Loading of vehicles for railway shipment shall be on open-top cars in accordance with rules governing the loading of Department of Defense materials on open-top cars and Loose Leaf Section No. 6 of the Association of American Railroads.

5.2.1.2 Highway haulaway shipment. The units shall be placed on bed or rails of haulaway vehicles so that the load is evenly distributed and secured. Parking brakes shall be locked and the levers wired or blocked in position. Loading of units for haulaway shall be in accordance with the Interstate Commerce Commission Motors Carrier Safety Regulations. Tire pressure shall be in accordance with MIL-V-62038.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

5.2.1.3 Highway towaway shipment. No processing of the trailer units running gear shall be performed prior to highway shipment that would impair necessary operation or safety during transit. Towaway rules for shipment by driveaway shall be in accordance with the Interstate Commerce Commission, Motor Carrier Safety Regulations. Tire pressure shall be the required running pressure. Processing of the trailer units running gear, not accomplished prior to highway shipment, shall be performed at intermediate destination when vehicles are to be placed in storage or shipped overseas.

5.3 Marking. In addition to caution and deprocessing marking, interior packages and trailer mounted units shall be marked in accordance with the applicable requirements of MIL-STD-129. Special requirements applicable to unpacked vehicles shall apply.

5.3.1 Humping precaution. A large sign containing the words "DO NOT HUMP" shall be secured in a conspicuous place on each side of the open-top car.

6. NOTES

* 6.1 Intended use. The trailer mounted bakery oven is intended for use as a component of the field mobile bakery unit to bake bread for troops in the field. The oven has a capacity of 36 bread pans. Each bread pan has a capacity of six 2 pound (.91 kg) bread loaves.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.2.1, 4.3.1 and 6.3).
(c) When initial production testing sample is required (see 3.2.2, 4.3.2 and 6.4).
(d) When inspection comparison testing sample is required (see 3.2.3, 4.3.3, 6.5 and 6.6).
(e) Sources and delivery of Government furnished property (see 3.9).
(f) Registration numbers to be furnished by the contracting officer (see 3.6.12).
(g) Level of preservation-packaging required (see 5.1).
(h) Whether railway, highway haulaway or highway towaway shipment is required (see 5.2.1.1, 5.2.1.2, and 5.2.1.3).

* 6.3 First article. When a first article is required it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

* 6.4 Initial production test. When an initial production test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the initial production test sample.

* 6.5 Inspection comparison test. When a comparison test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the comparison test sample.

* 6.6 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

6.7 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Review activity:

Army - MD, MT

User activity:


Army - ME

Preparing activity:

Army - GL

Project No. 7310-0571

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

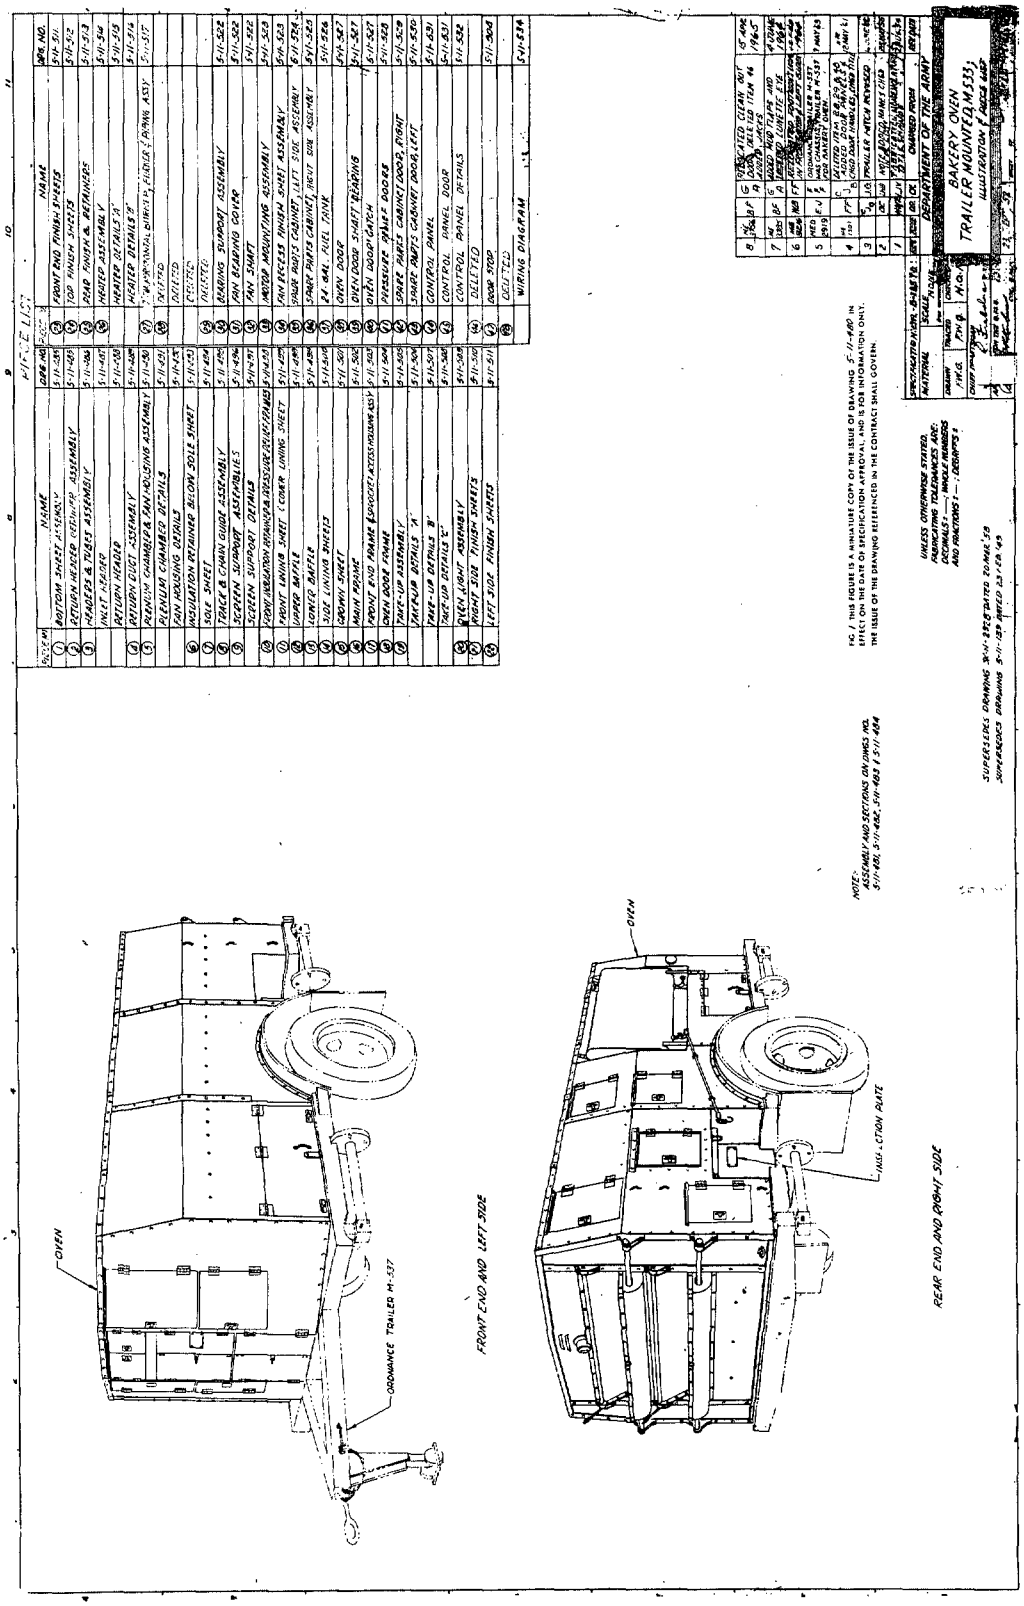

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/1441

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-12570D Bakery Oven, Trailer Mounted, M-533

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:01Z
Check the source to verify that this is the current version before use.