MILITARY SPECIFICATION

CRANE, TRUCK MOUNTED, HYDRAULIC, 25 TON

COMMERCIAL CONSTRUCTION EQUIPMENT (CCE)

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification. covers a commercial diesel-engine-powered 8 x 4 truck-mounted hydraulic crane suitable for operation as a crane, a crane with jib, clamshell, and pile-driving operation.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the. issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-E-52798 - Enamel, Alkyd, Camouflage.

STANDARD

FEDERAL

FED. STD. No. 595 - colors.

(Copies of specification and standard required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

TECHNICAL INFORMATION-PACKAGE

(Application for copies should be addressed to U.S. Army Mobility Equipment Research and Development Command, ATTN: DRXFB-H, Fort Belvoir, VA 22060.)

POWER CRANE AND SHOVEL ASSOCIATION

PCSA Standard No. 2 - Mobile Power Crane Standards.

(Application for copies should be addressed to the Power Crane and Shovel Association, Marine Plaza - Suite 1700, 111 E. Wisconsin Ave., Milwaukee, WI 53202 .)

U.S. DEPARTMENT OF LABOR

Occupational Safety and Health Act (OSHA) Standards.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 2-0402.)

SOCIETY OF AUTOMOTIVE ENGINEERS

SAE Handbook

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE

45 CFR, Part 1201- Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

DEPARTMENT OF TRANSPORTATION

Motor Carrier Safety Regulations.
Federal Motor Vehicle Safety Standards.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402 .)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

TIRE AND RIM ASSOCIATION, INC.

Tire and Rim Association Yearbook.

(Application for copies should be addressed to the Tire and Rim Association, Inc., Comand Building, 34 North Hawkins Avenue, Akron, OH 44313.)

(Technical society and technical association specifications and standards are generally available for reference front libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 General. The crane shall consist of the revolving superstructure and mobile truck carrier. The crane shall meet all of the requirements set forth for compliance with the Power Crane and Shovel Association Standards, Department of Transportation (DOT) Federal Motor Vehicle Safety Standards (FMVSS), Motor Carrier Safety Regulations (MCSR) for Over-The-Highway use, and the Occupational Safety and Health Act (OSHA) Standards which are in effect for this type of equipment on the date of the opening of the bids. The crane shall be the current commercial production model of a standard product and, except for product improvenents, optional equipments and accessories required to meet the requirements specified herein, shall have demonstrated industry acceptability by having been manufactured, marketed and sold in significant numbers to the commercial public: For the same or similar application, interfacing with the same or similar components for at least 1 year prior to the opening of the technical proposals or bid; or in the case of a recently introduced item, the manufacturer will submit sufficient valid industrial operational/test data to demonstrate the acceptability of the item. Crane width shall not exceed 8 feet - 0 inch. The crane shall be tested in accordance with and meet the recommendations of SAE J1063.

3.2 Performance. The crane shall be capable of:

(a) Lifting and swinging safe capacity loads not less than those specified in Table I thru an arc from a line passing thru the centers of both front outrigger-floats, on one side, around the rear end to the line on the other side of the crane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

Table I. Safe Load Capacity (in kips)

Boom radius (ft)	W/outriggers
12	50
15	40
20	30
30	14.9
40	8.5
50	5.5
60	3.5
70	2.2

(b) Performing clamshell bucket operation when equipped with the applicable front end attachments (see 3.12 and 4.2.7).
(c) Supporting military standard pile-driving leads for pile-driving operation with diesel-powered hammer (see 3.12 and 4.2.8).
(d) Starting and operation in any ambient temperature from minus 25° F to 125° F with onboard capability only,
(e) Attaining a travel speed of not less than 40 miles per hour (mph) on level paved roads.
(f) Traveling on unimproved terrain found in construction sites.
(g) Negotiating a 20 percent longitudinal slope and a 10 percent side slope.
(h) Superstructure rotation at a speed not less than 2 revolutions per minute (rpm).
(i) Night construction operation.
(j) Being driven into and off a C-5A aircraft (see Figure 1), All components that are required to be removed from the crane to facilitate loading and unloading the crane shall have adequate on-crane storage mounting facilities. Instructions or procedures for removal and installation of components and for loading and unloading shall be provided.
(k) Traversing a V-ditch course having a pitch of 7 to 9 feet and an amplitude of 1 to 1-1/2 feet both perpendicular to and diagonally across the trough of the ditches.

3.3 "Carrier. The carrier with the use of outriggers shall provide rigid support for the revolving superstructure when under maximum loads. The carrier shall be provided with power-assisted front wheel steering which incorporates manual steering in the event of power failure. The two rear axles (in tandem) shall be power driven. A boom rest and front towing eyes shall be provided on the carrier.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

3.3.1- 'Engine. The carrier shall be powered by a diesel engine complete with all accessories instruments, and gages required for operation. An hourmeter, engine, or carrier cab panel mounted, shall be furnished. The carrier engine may be used, if manufacturer's standard design, to provide the power source to the revolving superstructure. The engine shall conform to the requirement of the Environmental Protection Agency (EPA) Federal Emission Standards.

3.3.2 Transmission. The carrier shall be furnished with a transmission system and a clutch to provide-not less than 13 forward and 2 reverse speeds. Maximum speed in the lowest forward and reverse gear shall be not more than 3.2 mph when operating at governed engine speed.

3.3.3 Brakes. The carrier shall be provided with services parking~ and emergency brake systems in conformance to DOT regulations

3.3.4 Tires. All tires shall be of the traction lug type and shall have individual rated load-carrying capacities in accordance with the Tire and Rim Association Standards. A spare rim with inflated tire of the same size as furnished for the carrier front shall be furnished and mounted on the carrier. All tires shall be equipped with adequate valve extensions and be so mounted to permit checking tire pressure and inflation using standard tire servicing equipment.

3.3.5 Lights and reflectors. Lights and reflectors shall be furnished in accordance with DOT regulations for over-the-highway use. Polycarbonate lenses shall be provided for all lamps except headlights.

3.3.6 Cab. The carrier shall be provided with the manufacturer's commercial cab with lockable doors An adjustable seat with seatbelt in accordance with SAE J4 and SAE J787 shall be provided. An air or electric operated windshield wiper shall be provided. A personnel heater and defroster with heat ducted from heater shall be furnished. Instruments and gages as required in 3.3.1 shall be panel mounted in the cab. All instruments, gages, and controls shall be clearly marked as to use and function. Right and left side carrier mounted mirrors shall provide for rearward unobstructed vision. The mirrors shall be the heavy duty, west coast type with lock or ratcheting heads and brush guards, each with at least three support arms. Each mirror assembly shall be capable of folding to reduce the overall width of the vehicle. The cab shall be provided with a padded sun visor. All doors and ignition will utilize the same key and be interchangeable with all other cranes procured under this procurement.

3.3.7 Outriggers. Four hydraulically-powered outriggers capable of leveling and providing stability to the crane during crane operation shall be "furnished. Devices to accurately determine when crane is level shall be installed in a position convenient to the outrigger controls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.3.8 Hydraulic system. The hydraulic system shall include pump(s), motor(s), hydraulic cylinder(s), strainer(s), filter(s), reservoir(s), pressure-relief valve(s), and all necessary lines, lockout(s), restrictor(s), and control valve(s) to insure positive control of all operations and to provide protection in the event of loss of hydraulic power. The hydraulic system shall support all carrier hydraulic operations and when manufacturer's crane design incorporates a single engine, shall support the superstructure hydraulic system.

3.3,9 Electromagnetic interference. The electromagnetic interference characteristics of the crane shall meet the recommended limits specified in SAE J551 when measured in accordance with SAE J551.

3.3.10 Fuel tank. A fuel tank with sufficient capacity for at least 8 hours of normal operation shall be provided.

3.4 Superstructure. The superstructure shall be mounted on the carrier in such a manner to provide for 360 degrees continuous rotation and to withstand all forces imposed during crane operation. Two catwalk mounting clips shall be furnished and installed on the superstructure as shown in Figure 2. The counterweight shall be of the removable type with built-in removal features on the crane.

3.4.1 Cab. The superstructure shall be provided with the manufacturer's commercial cab with a lockable door. An adjustable seat shall be furnished. A hot water, diesel or gasoline type personnel heater and defroster with heat ducted from heater shall be furnished. An air or electric operated windshield wiper shall be provided. Panel mounted instruments and gages as required for monitoring the superstructure operation shall be furnished. All instruments, gages, and controls shall be clearly marked as to the use and function.

3.4.2 Engine. Superstructure engine, when furnished, shall conform to the requirements in 3.3.1.

3.4.3 Hydraulic system. Hydraulic system shall conform to the requirements in 3.3.8 as applicable.

3.4.4 Boom. The superstructure shall be provided with the manufacturer's commercial boom. The boom shall be capable of extending in a horizontal position to a length of not less than 72 feet from the center of rotation. Extension, retraction, elevating and lowering of the boom, superstructure rotation, and load hoisting shall be accomplished by hydraulic controls located in the superstructure cab.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

A boom angle indicator visible to the operator when in the normal operating position shall be furnished. The boom shall be provided with a bracket for mounting the tagline (see 3.12). Mounting provisions shall be provided on the boom tip for mounting the piledriver adapter plates (see 3.4.12 and Figure 3). Sheaves shall be in accordance with SAE J881.

3.4.5 Jib boom. A self-storing jib boom not less than 20 feet in length shall be furnished. The jib boom shall be provided with the necessary risers, overhaul ball with safety-latched swivel hook, and ropes.

3.4.6 Hook block. The hook block shall be capable of lifting the maximum rated load of the crane and of paying out the rope without load on the hook.. The hook shall be the swivel type with a safety latch.

3.4.7 Hoisting drums. Main and auxiliary hydraulic motor powered drums shall be provided. The power down shall have sufficient capacity to hold a rated load without slippage. Free fall drum capability for a two-line clamshell bucket is required (see 3.12).

3.4.8 "Wire rope. Wire rope shall be furnished and shall conform to SAE J959 and length as required to perform all crane operations specified herein.

3.4.9 Lighting. Two boom mounted and two front skirt mounted floodlights, all adjustable and shock mounted with superstructure instrument panel mounted on-off switch shall be provided.

3.4.10 Overload warning device. An overload warning device shall be provided to indicate limits of crane operation at rated loads at all radii. Visual and audible warnings shall be provided to warn the operator when load limits have been reached.

3.4.11 Load capacity chart. A permanent load capacity chart with the manufacturer's recommended load capacity for boom and jib operation shall be furnished. Capacity load capabilities shall be not less than those specified in 3.2. The chart shall include clamshell ratings.

3.4.12 Pile-driver adapter plates. Each crane shall be furnished with one set of pile-driver adapter plates, with all mounting hardware, compatible with the manufacturer's boom and military standard pile-driving leads. The crane shall be provided with a storage provision for the plates when not in use. .

3.5 Maintenance. The crane design, together with the accessories, shall permit ready access to all items requiring periodic maintenance service in the field. To the maximum extent feasible, periodic maintenance shall be accomplished with the use of conventional general purpose tools normally associated with equipment of this type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.5.1 Special tools. Any special tools required for operation and operator maintenance of the crane shall be furnished with each crane.

3.5.2 'Toolbox. The crane shall be provided with a permanently attached lockable toolbox or compartment to carry tools and accessories required for operation and operator maintenance of the crane.

3.6 Treatment and painting. The parts-of the crane normally painted shall be cleaned, treated, and painted in accordance with the offeror's standard commercial practice. The final color shall be forest green in accordance with MIL-E-52798.

3.7 Lifting and tiedown attachments. Lifting and tiedown attachments, for worldwide transport by air, rail, and ocean going carrier, if offered as a standard or optional equipment 'by the manufacture, shall be provided. If the attachments are not offered as standard or optional equipment, suitable procedures for lifting or tying down the crane shall be provided. Instructions for the use of the attachments, or lifting and tiedown procedures, shall be included on plates permanently affixed to the crane.

3.8 Noise level. If the noise level in the areas occupied by the operator exceeds 85 db(A) as measured in accordance with SAE J919, a warning plate(s) shall be permanently affixed to the crane in a conspicuous, protected location. The sign shall conform to Figure 4 and shall be clearly visible and legible to all personnel exposed to the hazard.

3.8.1 Safety. The crane shall comply with the applicable requirements of the OSHA standards which are in effect on the date of the opening of the bids.

3.9 Identification plates and marking.

(a) Each crane shall be provided with a plate, made of noncorrosive metal, 0.035 inch minimum thickness, on which is stamped, in letters not less than 0.25 inch high, the following information:

Nomenclature
NSN Number
Serial Number
Model
Contract Number
Shipping Date
USA Number
Shipping Weight
Shipping Cubage

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:39Z
Check the source to verify that this is the current version before use.

(b) The lettering, "US ARMY" and the US Army Registration Number shall be applied to each crane. Typical location is shown in Figure 5. The lettering shall be 3 inches high, and the color shall be lusterless black 37038, FED. STD. No. 595.

(c) A vehicle weight classification sign shall be applied to each crane. The sign shall consist of a 9-inch diameter yellow background circle with the crane's vehicle classification number in black. The-crane vehicle classification data shall be completed and submitted within the time frame specified (see 6.2). The contracting officer shall furnish the information required to apply the sign.

3.10 Lubrication. Each crane shall be serviced with military lubricants. The manufacturer shall identify military equivalent to his commercial lubricant in his lubrication section of his technical publication. The use of the military equivalent shall not void the manufacturer's warranty.

3.11 Government-furnished equipment (GFE). The following will be furnished by the Government for use under the contract:

(a) Case, Maintenance and Operator's Manual, NSN 7520-00-559-9618, complete with log book binder and forms.
(b) User Maintenance Support Plan.
(c) Initial Prescribed Load List and Initial Authorized List.
(d) Electrical Warning Decal Set, NSN 7690-00-267-5778.

3.11.1 Installation of Government-furnished equipment:

(a) The manufacturer shall furnish fasteners, and install on each crane, the GFE Maintenance and Operator's Manual Case (see 3.11(a)).
(b) The manufacturer shall apply the CFE Electrical Warning Decal Set (see 3.11(d)) according to instructions provided by the contracting officer.

3.12 Government-loaned equipment. The following items required to perform the first article demonstration shall be loaned by the Government:

ITEM	QTY	NSN
Catwalk, Pile Driver	1 set	3815-00-190-3308 .
Hammer, Pile Driver Self Powered, 8,000 ft lb	1 ea	3895-00-014-0583
Lead Sections Lower Pile Driver	4 ea	3815-00-221-2215
Lead Sections Top Pile Driver	1 ea	3815-00-983-8029
Bucket, Clamshell, 3/4 Cu Yd (two line type)	1 ea	3815-00-109-3357
Tagline, Crane and Crane-Shovel, 3/4 to 1 cu yd	1 ea	3815-00-249-8387

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

a

3.13 Basic issue items and commercial manuals. Each crane shall be overpacked with:

(a) The items specified in the Basic Issue Items List.
(b) TWO copies of the Government approved commercial operator, Parts, and Maintenance Manuals and Lubrication Order.

3,14 Certification. The manufacturer, and his component contractor where applicable, shall provide, within the specified time frame (see 6.2), certificates of conformance that the crane, components and materials conform to the following to the extent specified herein:

(a) Compliance with PCSA Standard No. 2.
(b) Compliance with DOT FMVSS and MCSR.
(c) Department of Labor (OSHA) Regulations.
(d) Suitability for operation in the temperature range specified in 3.2(d).
(e) Suitable for transport in a C-5A aircraft (3.2(j)).
(f) Electromagnetic interference characteristics (3.3.9).

3.15 Transportability data. The Government will collect and record transportability data. The contractor shall make the crane available to the Government for the required data determinations.

3.16 Identical items. All cranes furnished under this specification shall be physically and mechanically identical to the first article crane that is approved by the Government, except that product improvements incorporated in the contractor's standard commercial product lines are permitted at no cost subject to the following:

(a) Physical and performance characteristics defined herein have not been infringed.
(b) New components involving Government selected repair parts are directly interchangeable with the superseded component or part.
(c) The Government is notified of all changes and alterations a minimum of 15 days in advance of production commitment dates, and productions effectivity, by serial number and date, has been identified.
(d) Appropriate changes are issued to the Government validated operating, maintenance, and parts manuals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.17 Technical publications. 'Technical publications shall be furnished as specified in the contract or purchasing order (see 6.2}.

3.18 'Technical Information Package (TIP). The information in the TIP shall be completed depicting the crane and its components exactly as it will be furnished. Notation shall be made of all components which have not been in field use for a minimum of 1 year, and shall include identification of the component or part previously used. The manufacturer shall certify, by signing the TIP, that the item to be furnished is identical to those being procured for commercial use, except for modifications permitted in 3.1 of the specification. The TIP shall be submitted with all bids and proposals.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection, Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government? The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article evaluation and demonstration. Prior to delivery under the contract, the manufacturer shall make a crane available for first article evaluation and demonstration. The crane and its components shall be compared with this document, the manufacturer's completed Technical Information package (see 3.18) and published literature, calculation and test data, to verify compliance with this specifications The crane shall then be subjected to a demonstration as specified herein. Permanent deformation, overheating, malfunction, failure to meet performance requirements, failure to complete any test, or leakage of fuel, lubricants or hydraulic fluid shall be basis for rejection of the first article crane, If such deficiencies do arise, they shall be corrected and the first article evaluation and demonstration shall be repeatedt

4.2.1 Reading. The crane with jib boom, hook block, and counter-weight shall be driven for 8 hours at the maximum safe speeds. Travel per hour shall include a total distance of not less than 50 feet up and 50 feet down a 20 percent slope. Slope length shall 'be not less

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

than the carrier length. Not less than five each 90 degree right and left turns per hour shall be made. The crane shall travel not less than 1 mile in reverse. All lights shall be turned on and operated throughout this demonstration. The horn shall be operated not less than 10 times. The maximum travel speed shall be measured on firm level ground or pavement. The crane shall be driven on a 10 percent' side slope for not less than 100 feet.

4.2.1.1 Ditch. The crane shall traverse a V-ditch course having a pitch of 7 to 9 feet and an amplitude of 1 to 1-1/2 feet for a distance of 300 feet, both perpendicular to and diagonally across the trough of the ditches.

4.2.2 Capacity load. In order to establish adequacy of the rated load chart, the crane shall lift, hold, swing (as defined in 3.2), and lower a load equal to 117.6 percent of the load chart rating at a 12 foot radius, at 70 foot radius, and at two additional intermediate radii. Tipping as defined by PCSA Standard No. 2 shall constitute failure. .

4.2.3 Overall structural integrity. The manufacturer shall submit a copy of the test report performed in accordance with SAE J1063. If test report is not available, the completed first article shall be tested in accordance with SAE J1063. All resultant test data shall be furnished with the first article report.

4.2.4 Hoisting. Hoist and lower a load of not less than 58,000 pounds at a 12 foot radius to a height of 10 feet for 10 times. Failure to have positive control shall be cause for rejection.

4.2.5 Rotation, Without a load and the boom retracted, revolve the superstructure 5 minutes clockwise and 5 minutes counterclockwise. Determine the number of revolutions per minute.

4.2.6 Outriggers. Without a hoist load, operate the outriggers to determine conformance to 3.3.7.

4.2.7 Clamshell. Install the Government-furnished clamshell and tagline and perform clamshell operation for 4 hours. Operation shall include digging, hoisting, swinging, and unloading at various radii up to 40 feet.

4.2.8 Pile-driving. Install the Government-furnished pile-driving leads on the boom-mounted adapter plates. With the Government hammer, drive two contractor-furnished 30 foot long piles their full length or to refusal. Operate the hammer on a pile driven to refusal for 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.2.9 Fuel capacity. The operating time per tank full of fuel shall be calculated based on normal operation. Normal operation shall be based on 3 hours of road operation at not less than 40 mph and 5 hours of crane operation.

4.3 Test report. The manufacturer shall prepare and submit the first article test report to the contracting officer for approval within . the time frame specified (see 6.2). This report shall include a detailed description of the conformance examination and demonstration performed, deficiencies encountered, and actions taken to correct the deficiencies.

4.4 Production run-in. Each production crane shall be tested as follows. Inability to complete the operation, overheating, malfunction, leakage of fluid, or failure of any components shall be cause for rejection of the crane by the Government until such malfunction is corrected

4.4.1 Craning. Perform hoisting, swinging, and lowering operations using primary and secondary hoist drums for a period of 10 minutes on each drum. Rated line pull shall be used.

4.4.2 Rotation. Without a load, revolve the superstructure clockwise for a period of 5 minutes. Repeat counterclockwise

4.4.3 Roading. Drive the crane for a distance of not less than 2 miles at speeds up to and including 40 miles per hour. Operate all lights, horn; and brake system, not less than two times during this test.

4.4.4 Boom. Extend fully and retract the boom five times. Raise and lower an extended boom five times.

5. PACKAGING

5.1 Preservation, packing, and marking. Each complete crane and all items issued with the crane shall be suitably preserved and packed for retail distribution directly to a using customer and in a manner to assure carrier acceptance and safe delivery to the destination at lowest rating in compliance with carrier rules and regulations applicable to the mode of transportation. In addition, the following specific requirements shall be accomplished Items with critical surfaces required for fit or function shall be provided protection by the use of preservative coating, volatile corrosion inhibitor, or desiccated packs. Items requiring protection from physical damage shall be protected by wrapping, pack compartmentization, or carbonizing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

of the individual item. Each cooling system shall be filled with a fresh clean solution of 50 percent water and 50 percent ethylene glycol type antifreeze with rust inhibitor, and a tag attached indicating the temperature to which the cooling system can be subjected to before freezing. Each crankcase shall contain the required amount of lubricating oil. A guide shall be furnished indicating the preservation and packing materials to be removed, in detail, and any other servicing required prior to placing the crane in operation. Marking shall reflect, as a minimum, the item name, national stock number, quantity, contract or purchase order number, and appropriate address markings on each unpacked item or shipping container. The marking shall be applied with a waterproof material, and shall provide a definite contrast.

6. NOTES

6.1 Intended use. The cranes, together with the various items of front-end operating equipment, are intended for use in handling materials, lifting and transporting loads short distances, and piledriving.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame for submitting the vehicle classification data (see 3.9(c) and 6.6).
(c) Time frame for submitting the data and certifications (see 3.14).
(d) Requirements for publications (see 3.17).
(e) Title and date of the Technical Information Package (see 3.18).
(f) Time frame for submitting the First Article Test Report (see 4.3).

6.3 Government-furnished property. The contracting officer should arrange to furnish the contractor the property specified in 3.11.


6.4 Government-loaned property. The contracting officer should arrange to loan the property specified in 3.12.

6.5 Publications. The contracting officer shall determine that the contractor's operators, parts, maintenance, and overhaul manuals and lubricants order are approved by the Government prior to accepting the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

FORWARD CARGO OPENING C-5A

FORWARD KNEEL POSITION

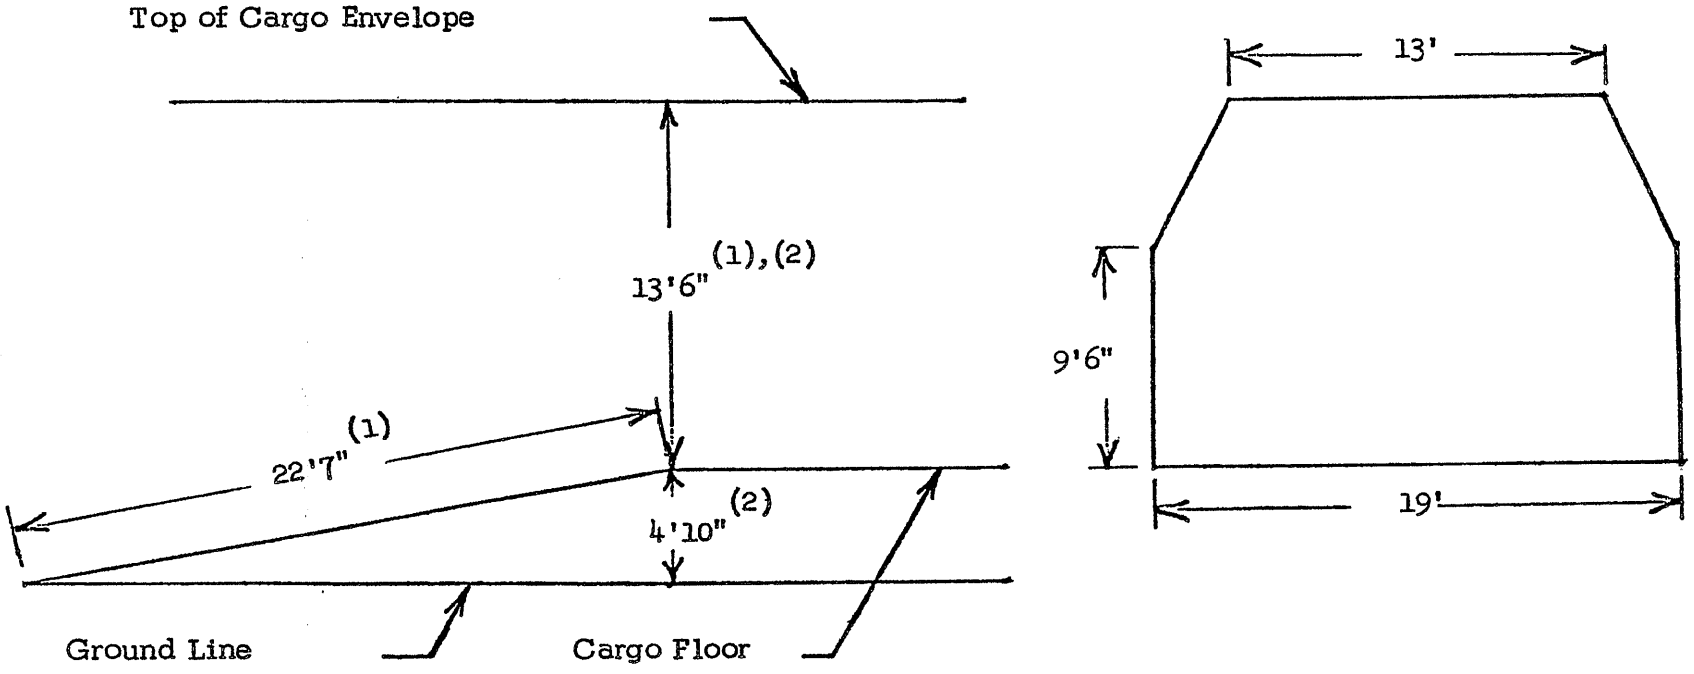


Not to Scale

(1) Reference: AMCP 706-130, Engineering Design Handbook, December 1967
(2) Reference: USATECOM Project No. 4-ES-065-050-004, Service Test of C-5A Aircraft, First Partial Report by H. H. Johnson, Jr., CPT, January 1971.

FIGURE 1.

X-3180

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:39Z
Check the source to verify that this is the current version before use.

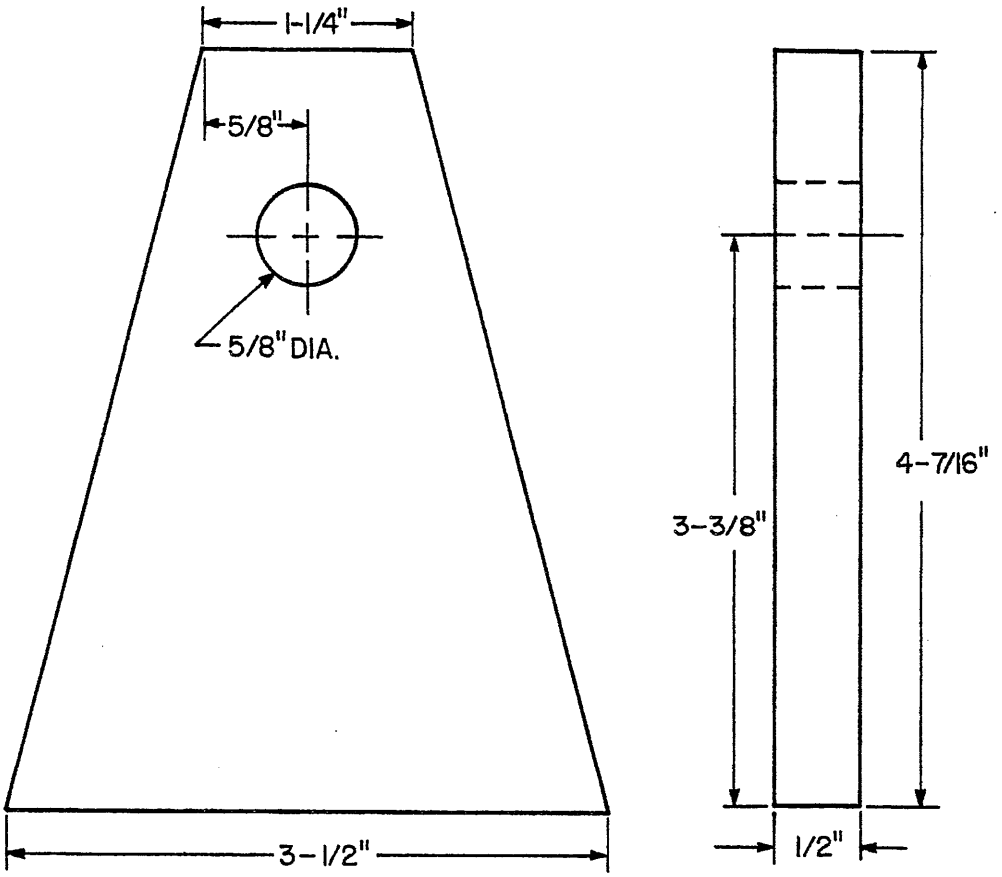

CATWALK CLIP DIMENSIONS

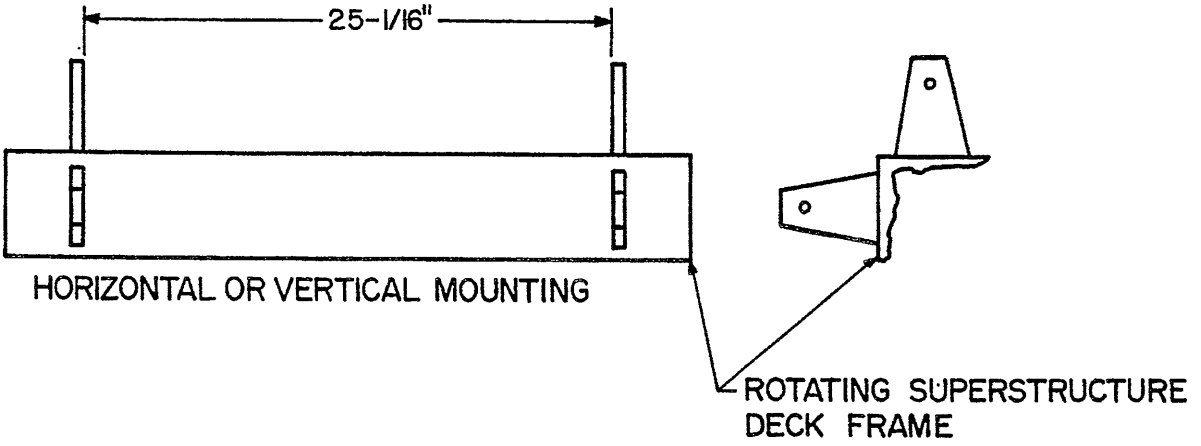


FIGURE 2. CATWALK CONNECTION CLIP

X-2959

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

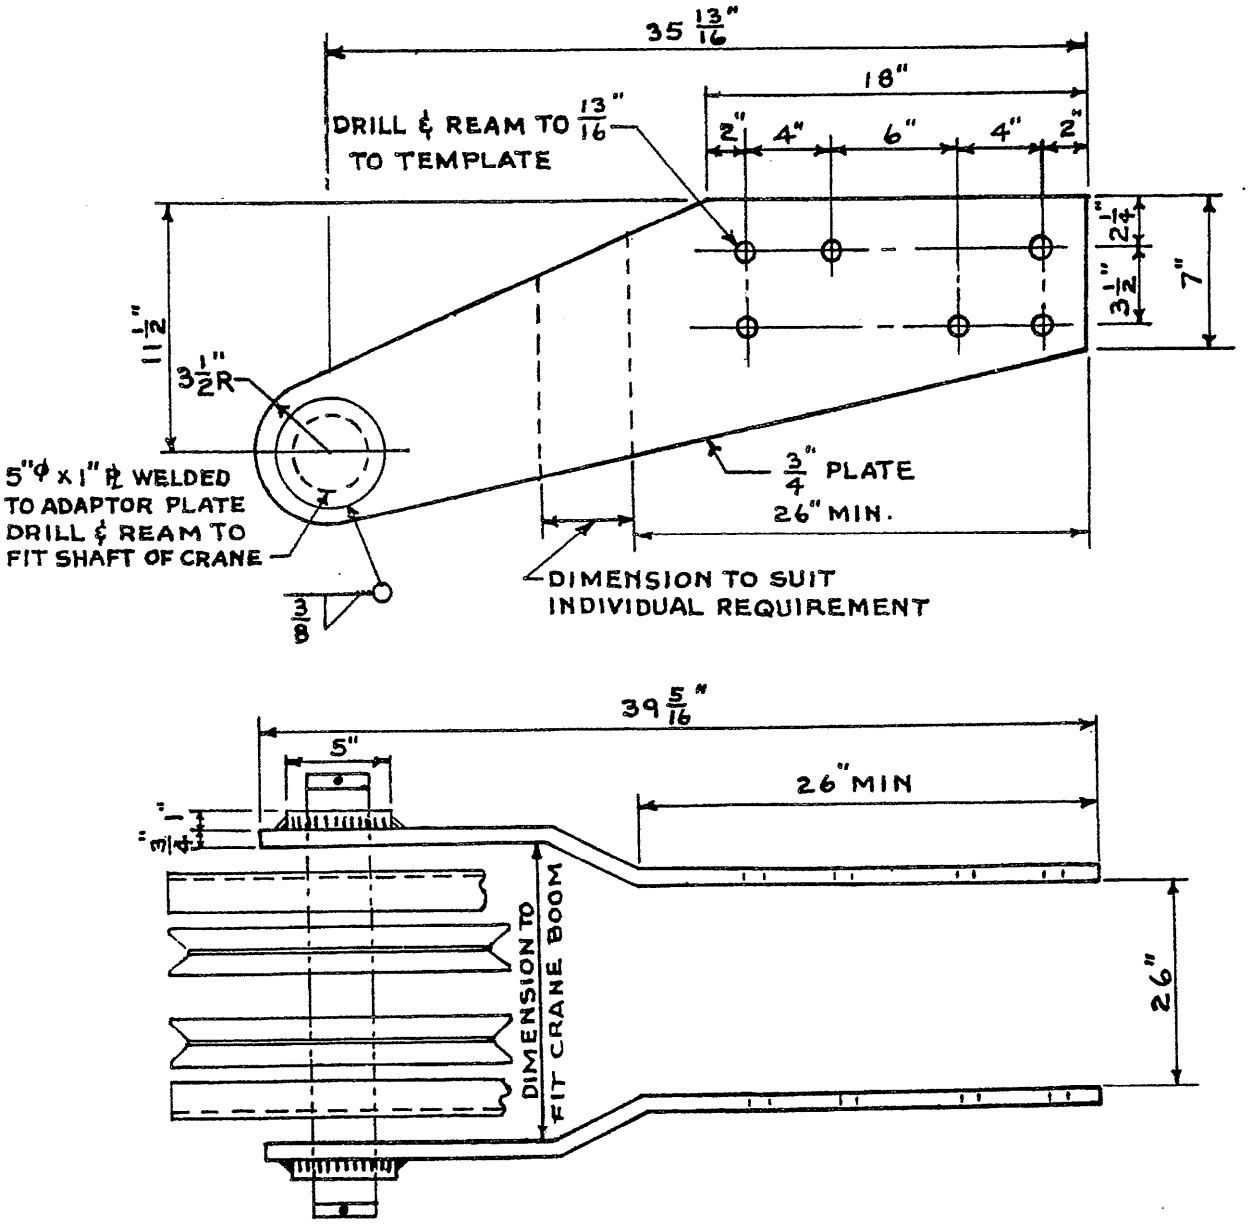



FIGURE 3. Pile driver lead adapter. X-1686

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.




FIGURE 4. Noise hazard caution sign. X-3181


Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

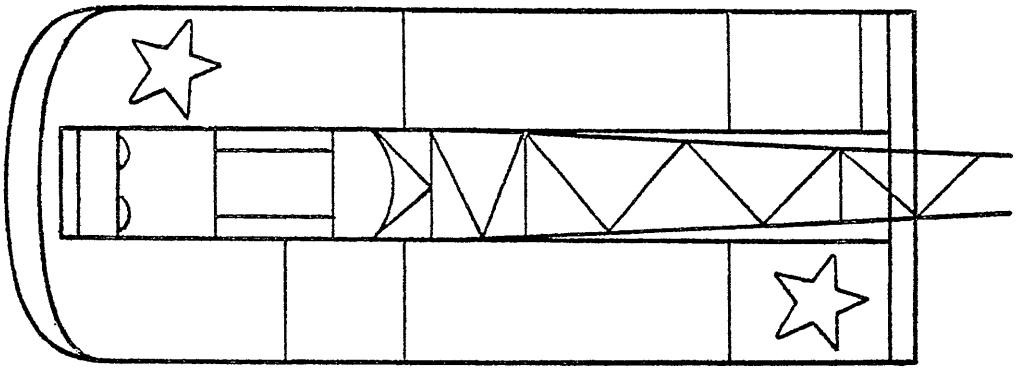


TOP VIEW

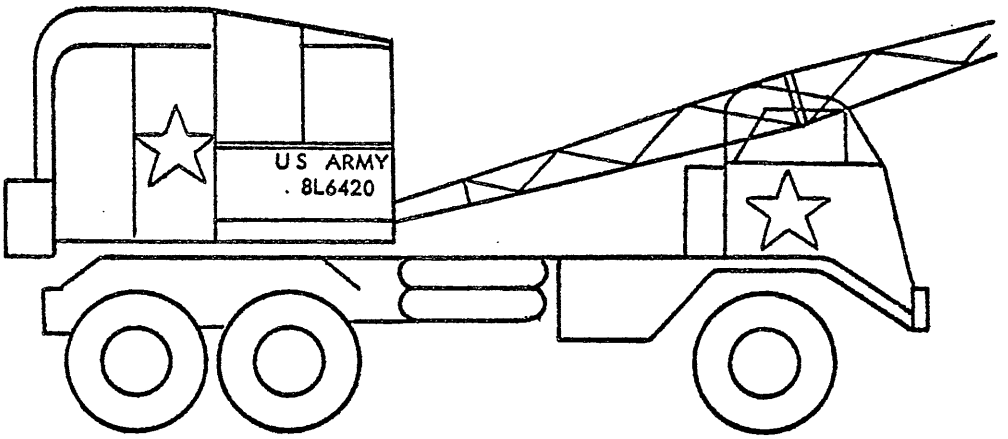

RIGHT SIDE
(LEFT SIDE IS SIMILARLY MARKED)

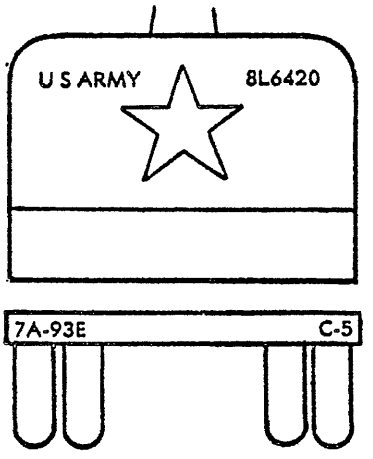

REAR

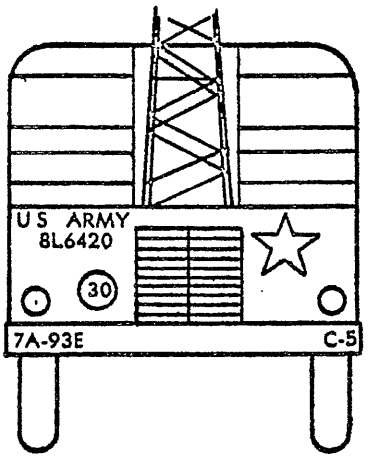

FRONT

FIGURE 5.

X-3182

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-C-52911(ME) Crane, Truck Mounted, Hydraulic, 25 Ton Commercial Construction Equipment (CCE)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.