[INCH-POUND]
OO-R-2872
April 15, 1997
SUPERSEDING
MIL-R-24005F
29 June 1992

FEDERAL SPECIFICATION

# ROLLERS, MOTORIZED, VIBRATING, TANDEM

The General Services Administration has authorized the use of this specification by all Federal agencies.

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers motorized, two-drum, vibrating rollers.

1.2 Classification. The rollers shall be of the following types as specified (see 6.2).

Type I - Single-drum-driven, single vibrating drum.
Type II - Double-drum-driven, double vibrating drums.

## 2. APPLICABLE DOCUMENTS

2.1 Government publications. The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Standard

FED-STD-595 - Colors Used in Government Procurement.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3895

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

Military Standard

MIL-STD-209 - Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.

(Copies of federal and military standards required by contractors in connection with specific procurement functions are obtained from the Defense Automated Printing Services, Attn: DoDSSP, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.1 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

Occupational Safety and Health Standards.

(Applications for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

ASTM

ASTM D 1557 - Test Method for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft$^3$ (2 700 kN-m/m$^3$)).
ASTM D 2487 - Standard Classification of Soils for Engineering Purposes.

(Private sector and civil agencies may purchase copies of this voluntary standard from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE J534 - Lubrication Fittings.

(Private sector and civil agencies may purchase copies of this voluntary standard from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

(DoD activities may obtain copies of those adopted voluntary standards listed in the DoD Index of Specifications and Standards free of charge from the Defense Automated Printing Services, Attn: DoDSSP, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 Description. The rollers shall consist of a steel vibrating drum(s), self-contained power source and drive system, sprinkler system, and an operator's station.

3.2 Standard commercial product. The rollers shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the rollers being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 First article. When specified (see 6.2), a sample roller shall be subjected to first article inspection in accordance with 4.2.1.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification.

3.5 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

3.6 Ease of maintenance. Design of the rollers shall permit ready accessibility to all parts for maintenance and repair using tools commonly associated with this type of equipment. Ease of maintenance provisions shall incorporate features ensuring clearances between adjacent components to facilitate maintenance and servicing operations. Components containing liquids shall be designed with an accessible gravity drain. The drain shall not allow liquid to contact any other component or the vehicle chassis.

3.7 Safety. Rollers shall meet safety requirements of OSHA in effect on date of manufacture. All components which may be hazardous to operating personnel, shall be furnished with safety



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:01Z
Check the source to verify that this is the current version before use.

guards. The rollers shall be furnished with a backup alarm which may include a timed shutdown switch to limit continuous operation. A roll-over-protection (ROP) device shall be furnished.

3.8 Dimensions and weights.

3.8.1 Dimensions. Rollers shall meet the dimensional requirements specified in table I.

TABLE I. Dimensions.

| Item | Dimensions in inches (millimetre (mm)) | |
|---|---|---|
| | Type I | Type II |
| Width: maximum overall | 46 (1 168 mm) | 56 (1 422 mm) |
| Length: maximum overall | 98 (2 489 mm) | 130 (3 302 mm) |
| Height: maximum (excluding ROP and exhaust) | 98 (2 489 mm) | 98 (2 489 mm) |
| Turning radius: inside maximum radius | 100 (2 540 mm) | 140 (3 556 mm) |
| Drum(s): minimum diameter | 20 (508 mm) | 24 (610 mm) |
| Drum(s): minimum width | 26 (660 mm) | 36 (914 mm) |

3.8.2 Weights. Type I rollers shall have a shipping weight of not less than 1,800 pounds (lb) (816 kilograms (kg)). Type II rollers shall have a shipping weight of not less than 3,600 lb (1 633 kg).

3.9 Performance. When on a firm level surface, the rollers shall have a maximum travel speed of not less than 1.5 miles per hour (mph) (2.4 kilometre per hour (km/h)) in both directions. The rollers shall be able to negotiate a 15 percent slope. The rollers shall have the capability of loading and unloading from standard transport (a gross gradeability of 30 percent). When tested as described in 4.4, the roller vibrating mechanism(s) shall operate at not less than 2,400 vibrations per minute (vpm). The rollers shall be capable of compacting hot and cold mixed asphaltic concrete and both fine and coarse grained soil. This compaction material shall be classified in accordance with ASTM D 2487. Following compaction testing (see 4.4), the maximum density, as determined by ASTM D 1557, shall be not less than 95 percent for both soils. The rollers shall withstand the strains imposed upon it without receiving any damage or deformation when operating at maximum frequency and as specified herein.

3.10 Roller components.

3.10.1 Frame. The frame shall be fabricated of structural steel sections or steel plates with members joined using one of the arc-welding processes. To withstand imposed stress, and to prevent deformation or damage to the rollers, the frame shall be braced and reinforced wherever necessary.

3.10.2 Power plant. The rollers shall have an engine providing horsepower (watt (W)) and torque characteristics as required to meet performance requirements as specified herein. Unless otherwise specified (see 6.2), the engine shall operate on diesel fuel. The engine shall have not


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

less than 12 horsepower (8 948 W) for type I, and not less than 30 horsepower (22 371 W) for type II rollers. Each roller shall be furnished with the following:

a. Fuel tank with capacity for not less than 5 hours' operation.

b. Dry type air cleaner, meeting engine manufacturers' requirements.

c. Exhaust system with muffler, including rain guards.

d. Electrical starting and charging system including lead acid battery of either 12 or 24 volts direct current design.

e. A weather-resistant enclosed battery box, or secured location within the roller body. The battery location shall be painted with acid-resistant paint.

f. Key type ignition switch and starter control.

g. Diesel engines shall be furnished with a positive means of securing engine, such as an electric or manually operated fuel shut-off.

h. Operator controlled throttle.

i. Hour meter with capacity of not less than 9,999 hours.

j. Manufacturer's standard instrument(s) panel with visual or electrical/audio type devices which will warn operator of low engine oil pressure, and excessive high engine operating temperature.

3.10.3 Power train. Roller(s) vibratory action shall be hydraulic powered and operator controlled at choice of speed. Motivation of drive roll(s) on type I rollers may be either hydrostatic or mechanical, but type II rollers shall be hydrostatic drive. The drive train system shall be capable of withstanding maximum torque of furnished engine while operating under the most adverse conditions. During all compaction operations, direction of travel shall be controlled by a single device. This device shall have a detent at neutral position or include a self-centering to neutral feature. Movement shall be in the same direction as the control device.

3.10.4 Drums. Drums shall be fabricated of steel plates with seams and heads joined using one of the arc-welding processes. Drums shall have a smooth surface and chamfered peripheral edges. Plate thickness shall be not less than 0.25-inch (6.35 mm) for type I rollers, and 0.375-inch (9.53 mm) for type II rollers.

3.10.5 Scrapers. Rollers shall have scrapers, located in the front and rear of each drum. All scrapers shall extend across the full width of each drum. The scrapers shall be capable of preventing the accumulation of material on the drums when rollers operate in either the forward or reverse direction.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

3.10.6 Sprinkler system. Rollers shall be equipped with a self-contained sprinkler system for wetting and cleaning of the drums. Sprinkler system shall consist essentially of a water tank, lines, wiper mats, spray headers, and valves. The water tank shall have a capacity of not less than 30 gallons (114 litre (L)), a filler opening with a cap having a diameter of not less than 1.5 inches (38 mm). The water tank shall be furnished with the manufacturers standard means to drain the tank. Piping shall be rigidly affixed to the frame; flexible lines shall be supported at 2-foot (610 mm) intervals or less. Wiper mats and spray headers shall be furnished on each drum and shall extend across the full width of each drum and shall completely wet the surface of the drums.

3.10.7 Vibrating mechanism(s). The rollers shall be furnished with the manufacturer's standard vibratory mechanism. The type I rollers shall include not less than one vibratory mechanism, but may have one in each roll if manufacture's standard design. The type II rollers shall include a vibratory mechanism in each roller. The intensity of the vibratory action shall be the operator's choice and include a frequency of not less than 2,400 vpm at full engine revolutions per minute. The dynamic force of the rollers (including weight and vibratory action) shall not be less than 5,000 lb (2 268 kg) for each vibratory drum. The roller design shall provide maximum insulation for the operator against the vibratory actions.

3.10.8 Brakes. The manufacturer's standard brake system, including service and park system shall be furnished. The brakes shall be capable of stopping the rollers within 4 feet (1 219 mm) when traveling on a level hard surface at 1.5 miles per hour (2.4 km/h). The parking brake shall be capable of stopping and holding the rollers stationary when moving either up or down a 15-percent slope with a hard surface.

3.10.9 Operator's station. Operator's station shall be equipped with a seat and backrest, instrument panel, and operating controls. All controls necessary for normal operation of the rollers shall be located within easy reach and visibility of the operator while seated. The required accessible controls include the brake, forward/reverse lever, steering wheel, vibrating mechanism(s) lever, and sprinkler valves. All controls and instruments shall be clearly identified for their intended operation and function with permanently affixed identification plates.

3.11 Tool storage. When specified (see 6.2), a weatherproof compartment or box shall be furnished for storage of tools and accessories required for normal daily operation of the rollers.

3.12 Lifting and tiedown attachments. When specified (see 6.2), the rollers shall be equipped with lifting and tiedown attachments. Lifting and tiedown attachments shall conform to type II or type III of MIL-STD-209. A nonferrous transportation plate shall be provided and mechanically attached to the rollers. Transportation plates shall be inscribed with a diagram showing the lifting attachments and lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the item furnished showing the center of gravity shall be provided on the transportation plate. Tiedown attachments may be identified by stenciling or other suitable marking. Tiedown marking shall clearly indicate that the attachments are intended for the tiedown of the rollers on the carrier when shipped.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

3.13 Lubrication. Unless otherwise specified (see 6.2), means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment, 1,000 pound-force per square inch (psi) (6 895 kilopascals) or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.14 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. Unless otherwise specified (see 6.2), the finish color shall be manufacturer's standard yellow, nearest match to No. 13538 of FED-STD-595. Surfaces to be painted shall be cleaned and dried to ensure that they are free from contaminants such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning, and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to ensure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils (0.064 mm) over entire surface. The paint shall be free from runs, sags, orange peel, or other defects.

3.15 Workmanship.

3.15.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to ensure uniformity of size and shape.

3.15.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.15.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.15.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

3.15.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the casting's ability to perform its intended function.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification, where such inspections are deemed necessary to ensure that supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one roller when a first article is required (see 3.3 and 6.2). This inspection shall include the examination of 4.3 and the tests of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3 and the operational tests of 4.5.

4.3 Examination. Each roller shall be examined for compliance with the requirements specified in section 3 of this document. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 First article tests. The first article shall be subjected to the tests specified in 4.4.1 through 4.4.3.

4.4.1 Performance test. The rollers shall be measured and weighed to verify conformance to 3.8. Before starting tests, the manufacturer shall present calculations to verify conformance to dynamic force requirements of 3.10.7. The rollers shall be operated continuously at full rated engine speed, with vibrating mechanism(s) engaged, for period of 4 hours. At the conclusion of the 4-hour test, the rollers shall be checked for lubrication and any signs of damage or deformation. Rollers shall be operated for an accumulated period of 16 hours, including the specified 4-hour run in test period. Tests 4.4.2 and 4.4.3 may be performed at the same time. The rollers shall be tested for the following:

a. Travel speed (see 3.9).

b. Negotiating a 15 percent grade (see 3.9) and 30 percent grade in loading and unloading on transport (see 3.9).

c. Vibratory frequency measured with gauge or meter (see 3.10.7).

d. Service and parking brake demonstration (see 3.10.8).

Every 4 hours the rollers shall be examined for excessive wear, overheating, and any signs of damage or deformation. Throughout the test, rollers shall be observed to verify compliance with:

e. Safety requirements as specified (see 3.7).

f. Frame capability to resist deformation or damage (see 3.10.1).

g. Fuel tank operational capacity (see 3.10.2).

h. Excessive vibratory action transfer to operator station (see 3.10.7).

i. Operational controls and instruments (see 3.10.9).

4.4.2 Compaction test.

4.4.2.1 Asphalt. A level test area of not less than three times the length and width of rollers shall be prepared. Asphalt of either hot or cold mix shall be spread evenly, not less than three inches (76 mm) thick, over the test area. When operated as described in 3.9, the rollers shall compact the complete area while making not more than five passes over any specific location. During this


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

operation, the rollers shall demonstrate the sprinkler system described in 3.10.6. A section of the compacted area shall be removed for inspection of compaction capability.

4.4.2.2 Soil. Two level test areas of not less than three times the length and width of the rollers shall be prepared. A layer of fine grained soil shall be spread evenly over one area to not less than 4 inches (102 mm) or more than 6 inches (152 mm) in depth. The second area shall be spread evenly with coarse grained soil to not less than 6 inches (152 mm), or more than 8 inches (203 mm) in depth. The rollers shall compact each area separately by making not more than six passes over the fine grained soil and four passes over the coarse grained soil. The contractor shall verify compaction to requirements of 3.9, utilizing any certified method of their choice which may be available.

4.4.3 Lifting and tying down attachment tests. Lift and tiedown devices shall be tested to verify conformance to MIL-STD-209 requirements. Contractor may request substitution of certified engineering drawings and calculations in lieu of actual demonstration. Request shall be made far enough in advance of first article test date to allow for acceptance or requirement of actual test performance.

4.5 Operational test. Each production roller shall be completely assembled, properly adjusted, and serviced for operation. Engine shall be started and subjected to a warm up period as recommended by the manufacturer. Rollers shall be operated for not less than 30 minutes. During this operation period, the rollers shall be function tested utilizing all controls. All controls and switches shall be operated as many times as necessary to determine ease of operation, effectiveness, responsiveness, and that mechanism actuated by the controls operate promptly, fully, and without restriction, malfunction, or excessive vibration. During and after completion of this function, the rollers shall be inspected for any malfunction, leaks, or damage. Failure to pass any phase of this test shall be cause for rejection. The contractor's standard final quality test and examination will be acceptable if approved in advance by the purchasing agency.

## 5. PACKAGING

5.1 Packaging requirements. The preservation, packing, and marking shall be as specified in the contract or order.

## 6. NOTES

(This section contains information of a general or explanatory nature which is helpful, but is not mandatory.)

6.1 Intended use. The rollers covered by this document are intended for use in compacting bases for road patches, concrete slabs, sidewalks, and compacting hot and cold asphaltic concrete.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:


a. Title, number, and date of this specification.
b. Type of rollers required (see 1.2).
c. When first article roller is required for inspection and approval (see 3.3, 4.2.1, and 6.3).
d. When gasoline engine is required (see 3.10.2).
e. When a tool storage compartment is required (see 3.11).
f. When lifting and tying down attachments are required (see 3.12).
g. When lubrication is different than manufacturer's standard practice (see 3.13).
h. Color of finish paint other than as specified (see 3.14).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first article sample, or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Supersession data. This specification replaces Military Specification MIL-R-24005F, dated 29 June 1992.

6.5 Classification cross reference. Classifications used in this specification (see 1.2) are identical to those found in the superseded Military Specification MIL-R-24005F.

6.6 Part or Identifying Numbers (PINs). The specification number and type are combined to form PINs for rollers covered by this document (see 1.2). PINs for the rollers are established as follows:

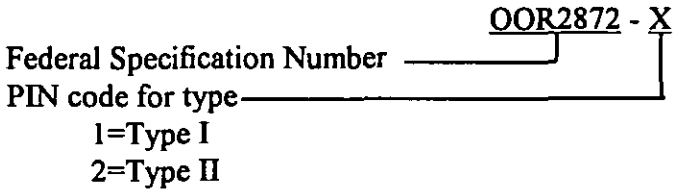


6.7 Definition.

6.7.1 Pass. Driving the rollers in one direction over the material being compacted, is defined as one pass. Driving the rollers over the original path a second time in the same or opposite direction is defined as two passes.

6.8 Subject term (key word) listing.

Compaction
Double drum
Single drum
Sprinkler system



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

6.9 Changes from previous issue. Marginal notations are not used to identify changes with respect to the superseded document.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing Activity:
Navy - YD1

(Project 3895-0046)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | OO-R-2872 | 970415 |

3. DOCUMENT TITLE
ROLLERS, MOTORIZED, VIBRATING, TANDEM

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME *(Last, First, Middle Initial)* | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS *(Include Zip Code)* | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON *(if applicable)* | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE *(Include Area Code)* | |
|---|---|---|
| R. E. PAMPLONA | (1) Commercial<br>805-982-5843 | (2) AUTOVON<br>551-5843 |
| c. ADDRESS *(Include Zip Code)*<br>COMMANDING OFFICER, NCBC CODE 15E2D<br>1000 23RD AVENUE<br>PORT HUENEME, CA 93043-4301 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>DEFENSE QUALITY AND STANDARDIZATION OFFICE<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

DD Form 1426, OCT 89 **Previous editions are obsolete.** 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:01Z
Check the source to verify that this is the current version before use.